

05/24/00

05-25-00

A

THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington D.C. 20231  
Box Patent Applications

Case Docket No. FUJI 17.354  
Filed by Express Mail  
(Receipt No. EL522391749US)  
on May 24, 2000  
pursuant to 37 CFR 1.10  
by Lydia Gonzalez

JC583 U.S. PTO  
09/577467  
05/24/00

S I R:

Transmitted herewith for filing is: ☒ a new application  
☐ a c-i-p application of S.N. \_\_\_\_\_ filed \_\_\_\_\_

Inventor(s): Yoshihito KUMAMOTO; Takako NAGAMINE; Ichiro AYUKAWA

For: MULTI-LEVEL MANAGEMENT SYSTEM FOR MONITORING  
COMMUNICATION APPARATUSES

Enclosed are:

- ☒ 29 sheets of drawings.(Figs. 1-29)
- ☒ Specification, including claims and abstract ( 73 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No(s). 11-184797
- ☒ An associate power of attorney
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☒ Information Disclosure Statement, PTO-1449, copies of 2 references
- ☐ Other \_\_\_\_\_
- ☐ Other \_\_\_\_\_

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	13-20 =	0
INDEP CLAIMS	3-3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\*If the difference in Col. 1 is less than  
zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
X 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$
x 78 =	\$
x 260 =	\$
TOTAL	\$690


☐ Please charge our Deposit Account No. 08-1634 the amount of \_\_\_\_\_ to cover the filing fee  
and recording fee (if any)

☒ A check in the amount of \$730.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or  
credit overpayment to Deposit Account No. 08-1634. A duplicate coy of this sheet is enclosed.

Helfgott & Karas, P.C.  
60<sup>th</sup> Floor  
Empire State Building  
New York, New York 10118-6098  
(212)643-5000

Respectfully Submitted,

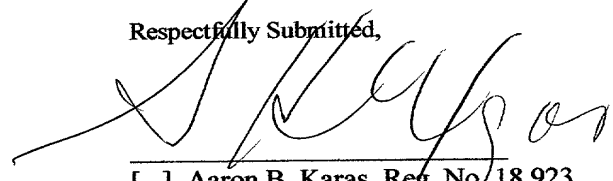

Date: 5/24/00

Any fee due with this paper, not fully  
covered by an enclosed check, may be  
charged on Deposit Acct No. 08-1634

- ☐ Aaron B. Karas, Reg. No. 18,923
- ☒ Samson Helfgott, Reg. No. 23,072
- ☐ Leonard Cooper, Reg. No. 27, 625
- ☐ Linda S. Chan, Reg. No. 42,400
- ☐ Jacqueline M. Steady, Reg. No. 44,354
- ☐ Harris A. Wolin , Reg. No. 39,432

Filed by Express Mail  
(Receipt No. EL52239124908)  
on 5/24/00  
pursuant to 37 C.F.R. 1.10.  
by Shen S. G.

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT WE, Yoshihito Kumamoto, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan, Takako Nagamine, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan and Ichiro Ayukawa, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

MULTI-LEVEL MANAGEMENT SYSTEM FOR  
MONITORING COMMUNICATION APPARATUSES

of which the following is a specification : -

**TITLE OF THE INVENTION**

MULTI-LEVEL MANAGEMENT SYSTEM FOR  
MONITORING COMMUNICATION APPARATUSES

5 **BACKGROUND OF THE INVENTION**

1. Field of the Invention

The present invention generally relates to  
a multi-level management system including a center  
monitoring apparatus and local monitoring  
10 apparatuses which monitor and control monitored  
apparatuses in a large-scale communication system  
comprised of a plurality of communication  
apparatuses.

2. Description of the Related Art

15 Due to widespread use of standardized SDH  
(synchronous digital hierarchy) communication  
networks, network configurations have been rapidly  
developing in terms of their size and diversity,  
being connected to various types of communication  
20 apparatuses in addition to conventional PDH  
(plesiochronous digital hierarchy) communication  
apparatuses.

To keep pace with this development,  
monitoring apparatuses for administering and  
25 controlling communication apparatuses in a system  
need to be equipped with system functions that make  
it possible to attend to central control of the  
large-scale communication system. It is no longer  
sufficient to be able to monitor and control  
30 communication apparatuses only in a confined area.

Also, an effort has been directed to a  
study on a multi-level management system in  
consideration of performance limitations of a single  
control apparatus as well as with an aim of  
35 attaining expandability. Here, the multi-level  
management system includes a central monitoring  
apparatus for processing summary information and

004250 294450

local monitoring apparatuses for controlling communication apparatuses within a given area. In such a multi-level management system, the center monitoring apparatus is expected not only to manage and control summary information but also to manage and control detailed information of each communication apparatuses in each area.

The reason why there is such a demand is that an administrator operating the central monitoring apparatus needs to be promptly and reliably informed of detailed information on current situations of each area if the situations are of an urgent nature. When there is failure that cannot be corrected by a local administrator operating on a local monitoring apparatus, or when there is a need for collaborative work between local administrators, the central administrator needs to provide prompt support. The central administrator needs to be prepared and ready to provide support to an area where a failure occurred, and such preparation must be arranged before there is an actual request from a local administrator. To this end, the central monitoring apparatus needs to be able to collect detailed information on status changes of communication apparatuses in much the same manner as the local monitoring apparatus can.

Fig.29 is an illustrative drawing showing a configuration of a multi-level management system.

Communication apparatuses  $3_{11}$  through  $3_{nm}$  are installed in various areas over a wide region (such as a nationwide region), and are to be monitored by monitoring apparatuses. The communication apparatuses  $3_{11}$  through  $3_{nm}$  detect status changes of various monitoring items, and transmit information on the status changes as an event message to local monitoring apparatuses  $2_1$  through  $2_n$  over a network 5. When receiving

004250 494250

instructions from the local monitoring apparatuses  $2_1$  through  $2_n$ , the communication apparatuses  $3_{11}$  through  $3_{nm}$  attend to various control processing.

The local monitoring apparatuses  $2_1$  through  $2_n$  monitor the communication apparatuses  $3_{11}$  through  $3_{nm}$  situated in their respective monitoring areas. The local monitoring apparatuses  $2_1$  through  $2_n$  display and update respective local monitor screens  $21_1$  through  $21_n$  that show monitored statuses of the communication apparatuses  $3_{11}$  through  $3_{nm}$ . Further, the local monitoring apparatuses  $2_1$  through  $2_n$  transmit data of the local monitor screens  $21_1$  through  $21_n$  to a central monitoring apparatus 1 over a network 4. Further, the local monitoring apparatuses  $2_1$  through  $2_n$  transmit summary information to the central monitoring apparatus 1 over the network 4 where the summary information is a summary of status changes of the communication apparatuses  $3_{11}$  through  $3_{nm}$ .

The central monitoring apparatus 1 attends to central monitoring of all the areas. The central monitoring apparatus 1 displays and updates a central monitor screen 11A that shows monitored statuses of all the area in response to the summary information sent from the local monitoring apparatuses  $2_1$  through  $2_n$ .

Further, the central monitoring apparatus 1 displays local monitor screens  $11B_1$  through  $11B_n$  which are the same as the local monitor screens  $21_1$  through  $21_n$  generated by the local monitoring apparatuses  $2_1$  through  $2_n$ . Here, the displaying of the local monitor screens  $11B_1$  through  $11B_n$  is performed by utilizing a screen display function of the local monitoring apparatuses  $2_1$  through  $2_n$ .

To implement such a multi-level management system as described above, a study has been conducted on use of a browser-based client-sever

004230 2942560

system. Here, a client is the central monitoring apparatus 1, and servers are the local monitoring apparatuses  $2_1$  through  $2_n$ .

A multi-level management system  
5 implemented in such a manner requires monitoring and controlling functions for the communication apparatuses  $3_{11}$  through  $3_{nm}$  to be provided only in the local monitoring apparatuses  $2_1$  through  $2_n$  that act as servers, and it is all that is required of  
10 the monitoring and controlling functions. Such a configuration means reduced burden on system developments, achieving desirable efficiency.

By the same token, there is a system in which the monitoring and controlling functions for  
15 the communication apparatuses  $3_{11}$  through  $3_{nm}$  are provided only in the local monitoring apparatuses  $2_1$  through  $2_n$ , and display operation functions are provided for each user by use of multi-window display software such as X-windows. In this system,  
20 the central monitoring apparatus 1 acting as a user makes a remote access to the local monitoring apparatuses  $2_1$  through  $2_n$ .

When the central monitoring apparatus 1 and the local monitoring apparatuses  $2_1$  through  $2_n$   
25 attend to monitoring and controlling of the communication apparatuses  $3_{11}$  through  $3_{nm}$ , however, there is a need to insure separate and independent operations between the central monitoring apparatus 1 and the local monitoring apparatuses  $2_1$  through  $2_n$ .  
30 Such care must be taken when operations for confirming status changes, operations for displaying operation results, etc., are performed.

When the central monitoring apparatus 1 displays the local monitor screens  $11B_1$  through  $11B_n$ ,  
35 information shown on the screen is the image information stored in the local monitoring apparatuses  $2_1$  through  $2_n$ . When operations for

004250" 2942560

confirming status changes are made on the local monitor screens  $11B_1$  through  $11B_n$  of the central monitoring apparatus 1, information about these operations is transmitted to the local monitoring apparatuses  $2_1$  through  $2_n$  via the network 4, so that the local monitoring apparatuses  $2_1$  through  $2_n$  update the local monitor screens  $21_1$  through  $21_n$  accordingly. The local monitoring apparatuses  $2_1$  through  $2_n$  then send data of the updated local monitor screens  $21_1$  through  $21_n$  to the central monitoring apparatus 1, allowing the central monitoring apparatus 1 to update the local monitor screens  $11B_1$  through  $11B_n$ .

In this configuration, the local monitor screens  $21_1$  through  $21_n$  of the local monitoring apparatuses  $2_1$  through  $2_n$  are updated even through operators of the local monitoring apparatuses  $2_1$  through  $2_n$  did not confirm the status changes by their confirmation operations.

By the same token, when operators of the local monitoring apparatuses  $2_1$  through  $2_n$  operate the apparatuses to confirm status changes on the local monitor screens  $21_1$  through  $21_n$ , these confirmation operations end up being reflected by the local monitor screens  $11B_1$  through  $11B_n$  of the central monitoring apparatus 1. Namely, the display screens of the central monitoring apparatus 1 are affected by operations made not by the operator of the central monitoring apparatus 1, creating inconsistency between operation and display.

Further, the central monitor screen 11A of the central monitoring apparatus 1 does not reflect confirmation operations made at the local monitoring apparatuses  $2_1$  through  $2_n$ . This results in inconsistency between the central monitor screen 11A and the local monitor screens  $11B_1$  through  $11B_n$ .

Accordingly, there is a need for a multi-level management system which allows a monitor

0057467-052400

screen to reflect an operator operation only if the operation is made at a monitoring apparatus having the very same monitor screen, and keeps consistency of displayed information between the central monitor  
5 screen 11A and the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> of the central monitoring apparatus 1.

Moreover, when an administrator displays a screen showing various items of status changes, and attends to a confirmation operation, all the items  
10 of the displayed status changes are treated as being confirmed. This is the case even when the items are managed by numbers assigned thereto. This presents a problem in that information cannot be confirmed on an item-wise basis. Accordingly, there is a need  
15 for a multi-level management system which allows an operator (administrator) to attend to item-wise confirmation.

Further, if the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> try to display all the  
20 detailed information that are received from the communication apparatuses 3<sub>11</sub> through 3<sub>nm</sub>, the size of the information to be displayed is prohibitively large. To cope with this, display restrictions may be placed on the types of information items, so that  
25 only selected items are displayed. In this case, the display restrictions set by the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> affect what is displayed on the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> of the central monitoring apparatus 1. Namely, information  
30 items displayed on the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> of the central monitoring apparatus 1 is subjected to the same display restriction.

On the other hand, display restrictions set by the central monitoring apparatus 1 do not  
35 affect data of the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> that the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> send to the central monitoring apparatus

00577467-052400



1. This results in an inconsistency between the central monitor screen 11A and the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> of the central monitoring apparatus 1.

5                   Accordingly, there is a need for a multi-level management system which allows a screen of a monitoring apparatus to reflect display restrictions only if the display restrictions are set in this monitoring apparatus, and allows information items  
10 selected by an administrator to be displayed while keeping consistency between the central monitor screen 11A and the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> of the central monitoring apparatus 1.

                  Further, when an operator of the central  
15 monitoring apparatus 1 operates on the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> to control the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> or the communication apparatuses 3<sub>11</sub> through 3<sub>nm</sub>, the central monitoring apparatus 1 will have the local  
20 monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> attend to the requested control processing. In this case, however, history of the operation is recorded in the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub>, but is not recorded in the central monitoring apparatus 1.  
25 This presents a problem that a control operation made at the central monitoring apparatus 1 cannot be later checked.

                  Accordingly, there is a need for a multi-level management apparatus which allows the central  
30 monitoring apparatus 1 to record history of operation even when the operation made at the central monitoring apparatus 1 is directed to control of the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> or the communication apparatuses 3<sub>11</sub>  
35 through 3<sub>nm</sub>.

#### SUMMARY OF THE INVENTION

It is a general object of the present invention to provide a system that substantially obviates one or more of the problems caused by the limitations and disadvantages of the related art.

5           Features and advantages of the present invention will be set forth in the description which follows, and in part will become apparent from the description and the accompanying drawings, or may be learned by practice of the invention according to  
10 the teachings provided in the description. Objects as well as other features and advantages of the present invention will be realized and attained by a system, a local monitoring apparatus, and a central monitoring apparatus particularly pointed out in the  
15 specification in such full, clear, concise, and exact terms as to enable a person having ordinary skill in the art to practice the invention.

To achieve these and other advantages and in accordance with the purpose of the invention, as  
20 embodied and broadly described herein, the invention provides a system for monitoring objects based on monitor information indicative of statuses of the objects, including a local monitoring apparatus configured to store therein a first set of the  
25 monitor information and a second set of the monitor information, to make the first set of the monitor information reflect an operation performed on the local monitoring apparatus, and to display the first set of the monitor information on the local  
30 monitoring apparatus, and a central monitoring apparatus configured to make the second set of the monitor information reflect an operation performed on the central monitoring apparatus through communication with the local monitoring apparatus,  
35 and to display the second set of the monitor information on the central monitoring apparatus.

According to another aspect of the present

004220 494250

invention, a monitoring apparatus for monitoring  
objects based on monitor information indicative of  
statuses of the objects includes a memory storage  
unit which stores therein a first set of the monitor  
5 information and a second set of the monitor  
information, a processing unit which makes the first  
set of the monitor information reflect an operation  
performed on the monitoring apparatus, and makes the  
second set of the monitor information reflect an  
10 operation performed on another apparatus connected  
to the monitoring apparatus via a network, an output  
unit which locally outputs the first set of the  
monitor information, and a transmission unit which  
transmits the second set of the monitor information  
15 to the another apparatus via the network.

Further, according to another aspect of  
the present invention, a monitoring apparatus for  
monitoring objects based on monitor information  
indicative of statuses of the objects, connected to  
20 a plurality of monitoring apparatuses each  
monitoring respective groups of the objects,  
obtaining the monitor information and a summary of  
the monitor information from each of the monitoring  
apparatuses, outputting the summary of the monitor  
25 information collectively for all the objects, and  
outputting the monitor information separately for  
each of the groups of the objects, includes a memory  
storage unit which stores therein the summary of the  
monitor information, and a processing unit which  
30 makes the summary of the monitor information, stored  
in the memory storage unit, reflect an operation  
performed on the monitoring apparatus, and sends a  
message to the plurality of monitoring apparatuses  
such that the plurality of monitoring apparatuses  
35 make the monitor information, stored in the  
plurality of monitoring apparatuses, reflect the  
operation performed on the monitoring apparatus.

09577457 "032420

**BRIEF DESCRIPTION OF THE DRAWINGS**

Fig.1 is an illustrative drawing showing a basic configuration of a multi-level management  
5 system according to the present invention;

Fig.2 is an illustrative drawing showing a monitor screen and main function blocks of a local monitoring apparatus according to the present invention;

10 Fig.3 is an illustrative drawing showing monitor screens and main function blocks of a central monitoring apparatus according to the present invention;

Fig.4 is a process flow of a process performed by the local monitoring apparatus when a status change occurs;

Fig.5 is a process flow of a process performed by the central monitoring apparatus when a status change occurs;

20 Fig.6 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is carried out;

Fig.7 is a process flow of a process performed by the central monitoring apparatus when a confirmation operation is carried out on a local monitor screen of the central monitoring apparatus;

25 Fig.8 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is carried out on the local monitor screen of the central monitoring apparatus;

Fig.9 is a process flow of a process performed by the central monitoring apparatus when a confirmation operation is carried out on a central monitor screen;

35 Fig.10 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is carried out on the central

0957467-052400

Fig.11 is a block diagram showing functions of the local monitoring apparatus; Fig.12 is a block diagram showing functions of the central monitoring apparatus; Fig.13 is a process flow of a process performed by the local monitoring apparatus at a time of a start of operation; Fig.14 is a process flow of a process performed at a time when a start operation is carried out on the central monitoring apparatus; Fig.15 is a process flow of a process performed by the local monitoring apparatus at a time when an operator operation for displaying a local-monitoring screen is carried out; Fig.16 is a process flow of a process performed at a time when an operator operation to display a local monitor screen is carried out on the central monitoring apparatus; Fig.17 is a process flow of a process performed by the central monitoring apparatus at a time when an operator operation to display a central monitor screen is carried out; Fig.18 is a process flow of a process of displaying status change at a time when a status change occurs; Fig.19 is a process flow of a process performed by the local monitoring apparatus when an operator operation to display a status-change-information list is performed; Fig.20 is a process flow of a process performed when an operator operation to display a status-change-information list is performed with respect to a local monitor screen of the central monitoring apparatus; Fig.21 is a process flow of a process performed by the central monitoring apparatus when

an operator operation to display a status-change-information list is performed with respect to a central monitor screen;

Fig.22 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is performed on the local monitoring apparatus;

Fig.23 is a process flow of a process performed when a confirmation operation is performed on a local monitor screen of the central monitoring apparatus;

Fig.24 is a process flow of a process performed when a confirmation operation is performed on the central monitor screen of the central monitoring apparatus;

Fig.25 is a process flow of a process performed when operation for making a setting to a threshold severity level is performed;

Fig.26 is a process flow of a process performed in response to a status change when there is a setting to a threshold severity level;

Fig.27 is a process flow of a process performed when a control operation is performed on a local monitor screen of the local monitoring apparatus;

Fig.28 is a process flow of a process performed when a control operation is performed on a local monitor screen of the central monitoring apparatus; and

Fig.29 is an illustrative drawing showing a configuration of a multi-level management system.

#### **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

In the following, embodiments of the present invention will be described with reference to the accompanying drawings.

Fig.1 is an illustrative drawing showing a

basic configuration of a multi-level management system according to the present invention. Fig.1 shows main functions provided in the system. The central monitoring apparatus 1 displays the central monitor screen 11A for showing monitored statuses of all local areas and the local monitor screens 11B<sub>1</sub> through 11B<sub>n</sub> for showing monitored statuses on an area-wise basis.

The central monitoring apparatus 1 includes a summary-event processing unit 12 and an operation recording unit 13. The summary-event processing unit 12 manages and controls monitored statuses and status changes with respect to each local area. The summary-event processing unit 12 receives a summary status-change message from each of the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub>, and detects a status change of a monitored status with respect to each local area. In order to have the central monitor screen 11A reflect the change, the central monitoring apparatus 1 informs a central-monitor-screen-display applet of this status change. The operation recording unit 13 records operation history with regard to control operations, option setting operations, etc., when an administrator operating the central monitoring apparatus 1 attends to these operations.

The local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> monitor statuses of the communication apparatuses 3<sub>11</sub> through 3<sub>nm</sub> within their respective monitoring areas, and display the local monitor screens 21<sub>1</sub> through 21<sub>n</sub> that show monitored statuses.

Each of the local monitoring apparatuses 2<sub>1</sub> through 2<sub>n</sub> includes a common part 20, a detailed-event processing unit 22, and an operation recording unit 23. The detailed-event processing unit 22 controls status-change-information tables for monitoring status changes of the communication

apparatuses  $3_{11}$  through  $3_{nm}$  separately for a local monitoring apparatus and for a central monitoring apparatus.

5 A status-change-information table 221 for a central monitoring apparatus is used for the local monitor screens of the central monitoring apparatus 1, and a status-change-information table 222 for a local monitoring apparatus is used for the local monitor screens of the local monitoring apparatuses  
10  $2_1$  through  $2_n$ .

The operation recording unit 23 records operation history with regard to control operations, option setting operations, etc., performed at the local monitoring apparatuses  $2_1$  through  $2_n$ . The  
15 operation history is recorded separately as an operation history 231 for the central monitoring apparatus and an operation history 232 for the local monitoring apparatus.

The status-change-information table 221  
20 for a central monitoring apparatus and the status-change-information table 222 for a local monitoring apparatus may be provided as separate physical memory units, or may be provided as separate logical units. By the same token, the operation history 231  
25 for a central monitoring apparatus and the operation history 232 for a local monitoring apparatus may be provided as separate physical memory units, or may be provided as separate logical units.

Fig.2 is an illustrative drawing showing a  
30 monitor screen and main function blocks of a local monitoring apparatus according to the present invention. Fig.3 is an illustrative drawing showing monitor screens and main function blocks of the central monitoring apparatus according to the  
35 present invention. Since all the local monitoring apparatuses  $2_1$  through  $2_n$  have the same configuration, a local monitoring apparatus will be described in

004250" 494250



the following with no suffix attached to a reference number.

As shown in Fig.2, local monitoring apparatus 2 displays a local monitor screen 21 and a list screen 21-3. As shown in Fig.3, the central monitoring apparatus 1 displays the central monitor screen 11A and a local monitor screen 11B as well as respective list screens 11A-3 and 11B-3.

The local monitor screen 21 of the local monitoring apparatus 2 and the local monitor screen 11B of the central monitoring apparatus 1 display monitored statuses of communication apparatuses installed at various locations within a given area. These screens are displayed on the local monitoring apparatus 2 and the central monitoring apparatus 1 by using a screen display function of the local monitoring apparatus 2.

The local monitor screen 21 and the local monitor screen 11B show communication-apparatus icons 21-1 and 11B-1, respectively, representing the communication apparatuses. The communication-apparatus icons 21-1 and 11B-1 indicate severity of status changes of monitored items by use of a corresponding display color. Here, the indicated severity is the most significant severity among a plurality of severities of respective monitored items.

Severity is a rank pre-assigned to a status change according to an urgency of a corrective action required to cure a situation when the status change occurs in the communication apparatuses 3<sub>11</sub> through 3<sub>nm</sub>. Severity is given to each monitored item. An example of ranks of severity is shown in Table 1 in the following.

Table 1

SEVERITY

URGENCY

	CR (critical)	most urgent
	MJ (major)	more urgent
	MN (minor)	urgent
	WR (warning)	less urgent
5	NA (not alarm)	least urgent

When a communication apparatus has a monitored item A having a status change of a severity level MJ (major) and a monitored item B having a status  
10 change of a severity level WR (warning), the communication-apparatus icons 21-1 and 11B-1 of this apparatus is displayed in a color corresponding to the severity MJ (e.g., orange).

Further, the communication-apparatus icons  
15 21-1 and 11B-1 are flickered in order to call an administrator's attention to a status change when the status change occurs in a corresponding communication apparatus. When an administrator checks the status change and confirms the situation  
20 by a confirmation operation, the flickering will stop.

The local monitor screen 21 and the local monitor screen 11B include respective list-display buttons 21-2 and 11B-2 for displaying a list of  
25 status-change information for the purpose of local monitoring. When the button is clicked, the list screen 21-3 or the list screen 11B-3 will be displayed.

The list screens 21-3 and 11B-3 of status-  
30 change information for local monitoring purposes include list fields 21-31 and 11B-31, which show status changes that occurred in the communication apparatuses in a chronological order. The list screens 21-3 and 11B-3 further include condition  
35 setting fields 21-32 and 11B-32, respectively, to make settings to conditions that are used to select information items displayed in the list screens.

004250 2546560

Information items to be listed in the list screens 21-3 and 11B-3 can be selected by using locations of the communication apparatuses, severity, etc., as search keys. The condition setting fields  
5 21-32 and 11B-32 include boxes corresponding to the search keys, and further includes a search start button.

Further, the list screens 21-3 and 11B-3 include confirmation buttons 21-33 and 11B-33,  
10 respectively. When an administrator clicks the confirmation button 21-33 or 11B-33 after confirming status changes listed in the list, the status changes are removed from the list as items being confirmed. If all the status changes are confirmed  
15 and erased for a given communication apparatus, a corresponding communication-apparatus icon 21-1 or 11B-1 stops flickering.

In Fig.3, the central monitor screen 11A of the central monitoring apparatus 1 displays a  
20 status of each local area that is monitored by a corresponding local monitoring apparatus 2. The central monitor screen 11A shows area icons 11A-1 each representing a status of a corresponding local area. An area icon 11A-1 of a given local area is  
25 displayed in a color that corresponds to the highest severity level among various severity levels of status changes occurring in this local area.

For example, when there is a monitored item A having a status change of severity MJ in a  
30 given local area, and there is a monitored item B having a severity WR in the same local area, the area icon 11A-1 of this local area is shown in a color corresponding to the severity MJ that is the highest of the two.

35 The area icons 11A-1 flicker in order to call an administrator's attention to status changes when the status changes occur in the corresponding

004250" 2942560

local areas. The flickering of an area icon 11A-1 stops when the administrator checks all the status changes occurring in a corresponding local area and confirms the situation by a confirmation operation.

5           The central monitor screen 11A includes a list-display button 11A-2 for displaying a list of status-change information for the purpose of central monitoring. When the button is clicked, a list  
10           screen 11A-3 is displayed to show a list of status-change information.

          The list screen 11A-3 of status-change information for central monitoring purposes includes a list field 11A-31, which shows status changes that  
15           occurred in the communication apparatuses in a chronological order. The list screen 11A-3 further includes a condition setting field 11A-32 for the purpose of making settings to conditions that are used to select information items displayed in the list screens.

20           Information items to be listed in the list screen 11A-3 can be selected by using locations of the communication apparatuses, severity, etc., as search keys. The condition setting field 11A-32 includes boxes corresponding to the search keys, and  
25           further includes a search start button.

          Further, the list screen 11A-3 includes a confirmation button 11A-33. When an administrator clicks the confirmation button 11A-33 after  
30           confirming status changes listed in the list, the status changes are removed from the list as items being confirmed. If all the status changes are confirmed and erased for a given local area, a corresponding area icon 11A-1 stops flickering.

          A local-monitor-screen-display applet 24  
35           provided in the local monitoring apparatus 2 controls displaying of the local monitor screen 21, and controls interfacing with operator operations

004250" 4944560

made to the local monitor screen 21. A local-monitor-screen-display applet 14B of the central monitoring apparatus 1 controls displaying of the local monitor screen 11B, and controls interfacing with operator operations made to the local monitor screen 11B. A central-monitor-screen-display applet 14A of the central monitoring apparatus 1 controls displaying of the central monitor screen 11A, and controls interfacing with operator operations made to the central monitor screen 11A.

A local-monitor-screen-interface unit 26 of the local monitoring apparatus 2 provides functions of exchanging messages and responses so as to support interface between the local-monitor-screen-display applet 24, the local-monitor-screen-display applet 14B, and various processing units of the local monitoring apparatus 2.

A central-monitor-screen-interface unit 16 of the central monitoring apparatus 1 provides functions of exchanging messages and responses so as to support interface between the central-monitor-screen-display applet 14A and various processing units of the central monitoring apparatus 1.

The detailed-event processing unit 22 of the local monitoring apparatus 2 has functions to manage and control current situations and status changes with respect to each monitored items of each communication apparatus. Further, the detailed-event processing unit 22 manages and controls status changes reported in summary information when the summary information is obtained for a local area that is monitored by the local monitoring apparatus 2.

The detailed-event processing unit 22 detects a status change of a monitored item in a communication apparatus upon receiving an event message from the communication apparatus. When this

004250" 4942450

happens, the detailed-event processing unit 22 sends an even message indicative of the status change to the local-monitor-screen-display applet 24 via the local-monitor-screen-interface unit 26, and, also,  
5 sends an event message indicative of the status change to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the network. Further, when detecting a status change in the summary information of the local area that is  
10 monitored by the local monitoring apparatus 2, the detailed-event processing unit 22 transmits an event message indicative of the status change to the summary-event processing unit 12 of the central monitoring apparatus 1 via the network.

15 Moreover, the detailed-event processing unit 22 receives a request for displaying current situations and status changes when the request is sent from the local-monitor-screen-display applet 24 or 14B. Upon receipt of the request, the detailed-  
20 event processing unit 22 sends requested information to the local-monitor-screen-display applet 24 or 14B, which displays in turn the contents of the status-change-information table on the display screen of the monitoring apparatus that issued the request.

25 The status-change-information tables 221 and 222 are respectively provided for the central monitoring apparatus 1 and the local monitoring apparatus 2, and are used to monitor and control a time of occurrence of a status change, a nature of a  
30 status change, etc., with respect to each monitored item that experienced a status change.

Generation and updating of the status-change-information tables 221 and 222 are attended to by the detailed-event processing unit 22. The  
35 detailed-event processing unit 22 generates a table for a monitoring apparatus when an administrator starts up this monitoring apparatus.

004250 2944560

Namely, when an administrator of the local monitoring apparatus 2 starts up the apparatus, the status-change-information table 222 for the local monitoring apparatus is generated. When an administrator of the central monitoring apparatus 1 starts up the apparatus, the status-change-information table 221 for the central monitoring apparatus is generated. Thereafter, each time a communication apparatus sends an event message, the detailed-event processing unit 22 updates the status-change-information tables 221 and 222 accordingly.

When an administrator performs a confirmation operation, the status changes that are confirmed are removed from a corresponding one of the status-change-information tables 221 and 222. Namely, when an operator of the local monitoring apparatus 2 confirms status changes, the status changes are removed from the status-change-information table 222 for the local monitoring apparatus. On the other hand, when an operator of the central monitoring apparatus 1 attends to confirmation operation, confirmed status changes are removed from the status-change-information table 221 for the central monitoring apparatus.

The summary-event processing unit 12 of the central monitoring apparatus 1 detects a status change of a local area when receiving a status change message in summary information that is sent from the local monitoring apparatus 2 via the network. Upon detection of the status change, the summary-event processing unit 12 sends an even message indicative of the status change to the central-monitor-screen-display applet 14A. Further, when receiving a request from the central-monitor-screen-display applet 14A requesting to display current situations and status changes, the summary-

event processing unit 12 extracts requested information from a status-change-summary table 121, and sends it to the central-monitor-screen-display applet 14A.

5                   The status-change-summary table 121 is used to monitor and control a time of occurrence of a status change, a nature of a status change, etc., with respect to each local area. Generation of the status-change-summary table 121 is attended to by  
10 the summary-event processing unit 12 at the time of start up of the central monitoring apparatus 1. Thereafter, whenever a message of status change of summary information is received from the local monitoring apparatus 2, the summary-event processing  
15 unit 12 updates the status-change-summary table 121. When the administrator of the central monitoring apparatus 1 confirms a status change on the central monitor screen 11A, the confirmed status change is removed from the status-change-summary table 121.  
20                   The status-change-information tables 221 and 222 store therein detailed information on each monitored item with respect to each communication apparatus provided within a given local area in order to provide status-change information for the  
25 local monitor screen 11B of the central monitoring apparatus 1 and the local monitor screen 21 of the local monitoring apparatus 2, respectively. On the other hand, the status-change-summary table 121 stores therein macro information on each area with  
30 respect to each severity level in order to provide status-change information for the central monitor screen 11A.

When status changes take place as shown in Table 2 as follows, information shown in Table 3  
35 will be displayed on the local monitor screens, and information shown in Table 4 will be displayed on the central monitor screen. (Please note that

004250" 2944560



Tachikawa cited in the tables is a name of a city in Tokyo.)

Table 2

5	1	Tachikawa	Failure of Equipment A	CR	present
	2	Tachikawa	Hitch of Equipment B	CR	present
	3	Tachikawa	Hitch of Equipment C	MN	present
	4	Tachikawa	Failure of Equipment A	CR	recovered
	5	Tachikawa	Hitch of Equipment B	CR	recovered

10

Table 3

	1	Tachikawa	Failure of Equipment A	CR	present
	2	Tachikawa	Hitch of Equipment B	CR	present
	3	Tachikawa	Hitch of Equipment C	MN	present
15	4	Tachikawa	Failure of Equipment A	CR	recovered
	5	Tachikawa	Hitch of Equipment B	CR	recovered

Table 4

	1	Tokyo	Tachikawa	CR	present
20	2	Tokyo	Tachikawa	CR	additional
	3	Tokyo	Tachikawa	MN	present
	4	Tokyo	Tachikawa	CR	partly recovered
	5	Tokyo	Tachikawa	CR	recovered

25                   When the central monitoring apparatus 1  
manages and controls status changes only with  
respect to occurrence and recovery thereof by using  
severity-based macro information, information shown  
on the central monitor screen in response to the  
30 status changes of Table 2 will be as follows.

Table 5

	1	Tokyo	Tachikawa	CR	present
35	3	Tokyo	Tachikawa	MN	present
	5	Tokyo	Tachikawa	CR	recovered

Fig.4 is a process flow of a process performed by the local monitoring apparatus when a status change occurs. Fig.5 is a process flow of a process performed by the central monitoring apparatus when a status change occurs.

Upon detecting a status change of a monitored item, a communication apparatus sends an event message indicative of the status change to the detailed-event processing unit 22 of the local monitoring apparatus 2 (step ST1).

Having received the event message, the detailed-event processing unit 22 checks whether there is a status change. If there is status change in a monitored item, the detailed-event processing unit 22 updates the status-change-information table 221 for the central monitoring apparatus and the status-change-information table 222 for the local monitoring apparatus (step ST2).

Further, the detailed-event processing unit 22 notifies the local-monitor-screen-interface unit 26 of the status change (step ST3-A). In response, the local-monitor-screen-interface unit 26 informs the local-monitor-screen-display applet 24 of the status change (step ST4-A), and, also, reports the status change to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the network (step ST4-B).

Further, the detailed-event processing unit 22 sends an event message to the summary-event processing unit 12 of the central monitoring apparatus 1 via the network (step ST3-B) if there is a change in summary information about a local area that is monitored by the local monitoring apparatus 2.

Upon receiving the message of status change from the local-monitor-screen-interface unit

0057467 052400  
004250 2947560

26, the local-monitor-screen-display applet 24 changes a display color of the communication-apparatus icon 21-1 of the communication apparatus that is experiencing the status change. This change  
5 of color is made based on the received status-change information. Further, the local-monitor-screen-display applet 24 updates the local monitor screen 21 so as to make the icon flicker, and displays a list of status-change information on the list screen  
10 21-3 in response to click on the list-display button (step ST5-A).

In the central monitoring apparatus 1, the local-monitor-screen-display applet 14B, which has received the message of status change, changes a  
15 display color of the communication-apparatus icon 11B-1 of the communication apparatus that is experiencing the status change. This change of color is made based on the received status-change information. Further, the local-monitor-screen-  
20 display applet 14B updates the local monitor screen 11B so as to make the icon flicker, and displays a list of status-change information on the list screen 11B-3 in response to click on the list-display button (step ST5-B).

25 Having received the event message indicative of status change in the summary information, the summary-event processing unit 12 updates the status-change-summary table 121 (step ST4-C), and sends an event message indicative of the  
30 status change to the central-monitor-screen-display applet 14A via the central-monitor-screen-interface unit 16 (steps ST5-C and ST6).

In response to the event message, the central-monitor-screen-display applet 14A changes a  
35 display color of the area icon 11A-1 of the area that is experiencing the status change. This change of color is made based on the received status-change

004250" 4942560

information. Further, the central-monitor-screen-  
display applet 14A updates the central monitor  
screen 11A so as to make the icon flicker, and  
displays a list of status-change information on the  
5 list screen 11A-3 in response to click on the list-  
display button (step ST7).

A process concerning the displaying of the  
list will be described below in detail. When the  
list-display button 21-2 is clicked on the local  
10 monitor screen 21 of the local monitoring apparatus  
2, the local-monitor-screen-display applet 24 sends  
a request for transfer of status-change information  
to the detailed-event processing unit 22 via the  
local-monitor-screen-interface unit 26.

15 In response to the request for transfer of  
status-change information, the detailed-event  
processing unit 22 reads status-change information  
from the status-change-information table 222 for the  
local monitoring apparatus, and sends the status-  
20 change information to the local-monitor-screen-  
display applet 24 via the local-monitor-screen-  
interface unit 26. The local-monitor-screen-display  
applet 24 has the list screen 21-3 reflect the  
contents of the status-change information.

25 When a list-display operation is performed  
on the local monitor screen 11B of the central  
monitoring apparatus 1, the local-monitor-screen-  
display applet 14B of the central monitoring  
apparatus 1 detects a click on the list-display  
30 button 11B-2. Then, the local-monitor-screen-  
display applet 14B sends a request for transfer of  
status-change information to the detailed-event  
processing unit 22 of the local monitoring apparatus  
2 via the network and the local-monitor-screen-  
35 interface unit 26 of the local monitoring apparatus  
2.

In response to the request for transfer of

004250 497450

status-change information sent from the central monitoring apparatus 1, the detailed-event processing unit 22 reads status-change information from the status-change-information table 221 for the  
5 central monitoring apparatus, and sends the status-change information to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the local-monitor-screen-interface unit 26 and the network. The local-monitor-screen-  
10 display applet 14B has the list screen 11B-3 reflect the contents of the status-change information.

When a list-display operation is performed on the central monitor screen 11A of the central monitoring apparatus 1, the central-monitor-screen-  
15 display applet 14A of the central monitoring apparatus 1 detects a click on the list-display button. Then, the central-monitor-screen-display applet 14A sends a request for transfer of status-change information to the summary-event processing  
20 unit 12 via the central-monitor-screen-interface unit 16.

In response to the request for transfer of status-change information, the summary-event processing unit 12 reads status-change information from the status-change-summary table 121, and sends  
25 the status-change information to the central-monitor-screen-display applet 14A via the central-monitor-screen-interface unit 16. The central-monitor-screen-display applet 14A has the list  
30 screen 11A-3 reflect the contents of the status-change information.

Fig.6 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is carried out.

35 When the confirmation button 21-33 is clicked on the list screen 21-3 of the local monitoring apparatus 2, the local-monitor-screen-

004250 294250

display applet 24 detects the click (step ST1). The local-monitor-screen-display applet 24 sends a request to the detailed-event processing unit 22 via the local-monitor-screen-interface unit 26 so as to request a confirmation process to be performed (steps ST2 and ST3).

Upon receiving the request for a confirmation process, the detailed-event processing unit 22 erases status-change information from the status-change-information table 222 for the local monitoring apparatus in accordance with the contents of the request (step ST4). Further, the detailed-event processing unit 22 sends a response acknowledging the status-change confirmation to the local-monitor-screen-display applet 24 via the local-monitor-screen-interface unit 26 (steps ST5 and ST6).

Having received the response, the local-monitor-screen-display applet 24 erases the confirmed information from the list screen 21-3 showing status-change information, and stops flickering of the communication-apparatus icon that represents the communication apparatus for which the status-change information was already confirmed (step ST7).

Fig.7 is a process flow of a process performed by the central monitoring apparatus 1 when a confirmation operation is carried out on the local monitor screen of the central monitoring apparatus. Fig.8 is a process flow of a process performed by the local monitoring apparatus 2 when a confirmation operation is carried out on the local monitor screen of the central monitoring apparatus.

When the confirmation button 11B-33 is clicked on the list screen 11B-3 associated with the local monitor screen 11B of the central monitoring apparatus 1, the local-monitor-screen-display applet

004250 4974560

14B detects the click (step ST1). The local-monitor-screen-display applet 14B sends a request to the detailed-event processing unit 22 via the network and the local-monitor-screen-interface unit 26 of the local monitoring apparatus 2 so as to request a confirmation process to be performed (steps ST2 and ST3).

Upon receiving the request for a confirmation process, the detailed-event processing unit 22 erases status-change information from the status-change-information table 221 for the central monitoring apparatus in accordance with the contents of the request (step ST4). Further, the detailed-event processing unit 22 sends a response acknowledging the status-change confirmation to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the local-monitor-screen-interface unit 26 (steps ST5-A and ST6-A), and sends a message indicative of status-change confirmation to the summary-event processing unit 12 of the central monitoring apparatus 1 (step ST5-B).

Having received the response acknowledging the status-change confirmation, the local-monitor-screen-display applet 14B erases the confirmed information from the list screen 11B-3 showing status-change information, and stops flickering of the communication-apparatus icon that represents the communication apparatus for which the status-change information was already confirmed (step ST7-A).

Having received the message indicative of status-change confirmation, the summary-event processing unit 12 erases the confirmed status-change information from the status-change-summary table 121 in accordance with the contents of the message, and sends a message indicative of status-change confirmation to the central-monitor-screen-

004250 294250

display applet 14A via the central-monitor-screen-interface unit 16 (steps ST7-B and ST8).

In response to the message indicative of status-change confirmation, the central-monitor-screen-display applet 14A erases the confirmed status-change information from the list screen 11A-3 showing status-change information, and stops flickering of the area icon 11A-1 that corresponds to the confirmed status-change information (step ST9).

Fig.9 is a process flow of a process performed by the central monitoring apparatus when a confirmation operation is carried out on the central monitor screen. Fig.10 is a process flow of a process performed by the local monitoring apparatus 2 when a confirmation operation is carried out on the central monitor screen.

When the confirmation button 11A-33 is clicked on the list screen 11A-3 associated with the central monitor screen 11A of the central monitoring apparatus 1, the central-monitor-screen-display applet 14A detects the click (step ST1). The central-monitor-screen-display applet 14A sends a request to the summary-event processing unit 12 via the central-monitor-screen-interface unit 16 so as to request a confirmation process to be performed (steps ST2 and ST3).

Upon receiving the request for a confirmation process, the summary-event processing unit 12 erases relevant status-change information from the status-change-summary table 121 in accordance with the contents of the request (step ST4). Further, the summary-event processing unit 12 sends a response acknowledging the status-change confirmation to the central-monitor-screen-display applet 14A via the central-monitor-screen-interface unit 16 (steps ST5-A and ST6-A), and sends a message

004250 2947560



Having received the response acknowledging  
5 the status-change confirmation, the central-monitor-  
screen-display applet 14A erases the confirmed  
information from the list screen 11A-3 showing  
status-change information, and stops flickering of  
the area icon 11A-1 that corresponds to the  
10 confirmed status-change information (step ST7-A).

In response to the message indicative of status-change confirmation, the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 erases the confirmed status-change information from the list screen 11B-3 that shows status-change information in association with the local monitor screen 11B, and stops flickering of the communication-apparatus icon 11B-1 that represents the communication apparatus for which status-change information was confirmed (step ST9).

In this manner, the present invention manages and controls the status-change-information  
35 tables 221 and 222 stored in the local monitoring  
apparatus 2 separately for different monitoring  
apparatuses, and attaches data indicative of an

operated monitoring apparatus to a request for a confirmation process, thereby preventing a confirmation operation performed on a monitoring apparatus from affecting a monitor screen of another monitoring apparatus. Further, when a confirmation operation is performed at the central monitoring apparatus 1, a request for a confirmation process is transmitted to the detailed-event processing unit 22 of the local monitoring apparatus 2 via the network, resulting in updating of the status-change-information table 221 for the central monitoring apparatus. This insures that the central monitor screen 11A and the local monitor screen 11B both displayed on the central monitoring apparatus 1 are synchronized with each other in terms of status of status-change confirmation, keeping consistency of displayed contents therebetween.

Namely, when status changes are confirmed by using the list 11B-3 associated with the local monitor screen 11B of the central monitoring apparatus 1, flickering of an area icon 11A-1 shown on the central monitor screen 11A will also be stopped where the area icon corresponds to an area having all the status changes thereof being conformed through the confirmation operation. At the same time, the corresponding status-change information is also erased from the list 11A-3 associated with the central monitor screen 11A.

On the other hand, when status changes are confirmed by using the list 11A-3 associated with the central monitor screen 11A of the central monitoring apparatus 1, flickering of communication-apparatus icons 11B-1 shown on the local monitor screen 11B will also be stopped where the communication-apparatus icons correspond to communication apparatuses having all the status changes thereof being conformed through the

004250 294660

confirmation operation. At the same time, the corresponding status-change information is also erased from the list 11B-3 associated with the local monitor screen 11B.

5                   When a confirmation operation is performed  
by clicking the confirmation button 21-33 or 11B-33  
on the list screen 21-3 of the local monitoring  
apparatus 2 or the list screen 11B-3 of the central  
monitoring apparatus 1, information about the  
10 confirmation operation is delivered to the detailed-  
event processing unit 22 through the local-monitor-  
screen-interface unit 26 from either the local-  
monitor-screen-display applet 24 of the local  
monitoring apparatus 2 or the local-monitor-screen-  
15 display applet 14B of the central monitoring  
apparatus 1. By checking the delivered information,  
the detailed-event processing unit 22 identifies the  
apparatus on which the confirmation operation has  
been performed, and updates a relevant one of the  
20 status-change-information table 221 and the status-  
change-information table 222. Updated contents are  
then sent to the summary-event processing unit 12 of  
the central monitoring apparatus 1.

Accordingly, the local monitor screen 21  
25 and the list screen 21-3 of the local monitoring  
apparatus 2 are independent of the local monitor  
screen 11B and the list screen 11B-3 of the central  
monitoring apparatus 1, providing separate control  
with respect to status-change-confirmation operation.

30                   Namely, when a confirmation operation is  
performed on the list screen 21-3 of the local  
monitoring apparatus 2, this operation does not  
affect flickering shown on the local monitor screen  
11B of the central monitoring apparatus 1. By the  
35 same token, when a confirmation operation is  
performed on the local-monitor list screen 11B-3 of  
the central monitoring apparatus 1, this

004250" 2944660

confirmation operation has no effect on flickering shown on the local monitor screen 21 of the local monitoring apparatus 2.

In the following, item-wise control of the status-change information will be described.

The status-change-information tables 221 and 222 are controlled such that status-change information is given ordinal numbers on a severity-wise basis. Further, the list screens of the local monitor screen and the central monitor screen lists status changes according to classification by severity or classification by areas. An administrator performs a confirmation operation after visually checking displayed status-change information. In response, a screen-display applet for a local monitor screen or a screen-display applet for a central monitor screen informs the detailed-event processing unit 22 or the summary-event processing unit 12 of a classification type of the displayed status-change information and the highest ordinal number given within this classification.

The detailed-event processing unit 22 receives the classification type and the highest ordinal number within this classification when they are sent from the local-monitor-screen-display applet, and updates the status-change-information table 221 or 222 that stores status changes according to the classification and ordinal numbers. After the updating, the detailed-event processing unit 22 notifies the local-monitor-screen-display applet of the updating of the status-change-information table 221 or 222. In response, the local-monitor-screen-display applet updates the local monitor screen.

In the same manner, the summary-event processing unit 12 receives the classification type

004250" 2942560

and the highest ordinal number within this classification when they are sent from the local-monitor-screen-display applet, and updates the status-change-summary table 121 that stores status changes according to the classification and ordinal numbers. After the updating, the summary-event processing unit 12 notifies the local-monitor-screen-display applet of the updating of the status-change-summary table 121. In response, the local-monitor-screen-display applet updates the local monitor screen.

Let us assume that a status-change-information table stores status changes as shown in Table 6.

Table 6

Num. in Severity	Num. of Change	Place	Item	Severity	Status
1	1	Tachikawa	Equipment A Failure	CR	present
2	1	Tachikawa	Equipment B Failure	CR	present
3	1	Tachikawa	Equipment A Hitch	CR recovered	
4	2	Tachikawa	Equipment B Hitch	CR recovered	
5	3	Tachikawa	Equipment C Failure	CR	present
6	4	Tachikawa	Equipment C Hitch	CR recovered	

Number in Severity indicates a number that is counted up each time a new status change is reported with respect to a given severity level. Number of  
5 Change indicates a number that is counted up each time the macro status-change information of a given severity level becomes "present" or "recovered". Namely, the number of change is not counted up even  
10 "recovered" as long as there is an item being "present" in the given severity level.

The local monitoring apparatus 2 informs the central monitoring apparatus 1 of status-change information as shown in Table 6. Let us assume that  
15 the central monitoring apparatus 1 has been so far informed of a status change up to Number in Severity 1, as shown in Table 7.

Table 7

20	Num. in Severity	Num. of Change	Place	Item	Severity	Status
	1	1	Tachikawa	Equipment A	CR	present
				Failure		

25 If an administrator confirms the status change at this point of time, the central monitoring apparatus 1 sends the severity level CR and the ordinal number 1 counted within this severity level to the local  
30 monitoring apparatus 2. Then, the local monitoring apparatus 2 performs the following steps with respect to Table 6:

- (1) identifying a status change having Number in Severity 1;
- 35 (2) finding Number of Change of the identified status change (i.e., 1 in this example);
- (3) identifying all the status changes having the

same Number of Change as that found above (i.e.,  
the first three entries of Table 6); and

(4) erasing all the identified status changes

In this manner, the present invention  
5 controls status-change information in a status-  
change-information table by classifying the  
information and assigning numbers within each  
classified group, so that an administrator can give  
partial confirmation within each classified group.  
10 Such partial confirmation means partial erasure of  
status-change information from the status-change-  
information table.

Further, the central monitoring apparatus  
1 is provided with a means to inform the  
15 administrator only of monitored items that have  
severity levels higher than a predetermined severity  
level. In this configuration, the central monitor  
screen 11A and the local monitor screen 11B of the  
central monitoring apparatus 1 do not show status-  
20 change information with respect to items having  
severity levels no higher than the predetermined  
severity level. Details of this configuration will  
be described later with reference to Fig.25 and  
Fig.26.

25 The detailed-event processing unit 22 of  
the local monitoring apparatus 2 compares a severity  
level of a status change reported by a communication  
apparatus with the predetermined severity level, and  
decides whether to display the reported status  
30 change on the local monitor screen 11B of the  
central monitoring apparatus 1. If the status  
change is to be displayed, it is sent to the local-  
monitor-screen-display applet 14B of the central  
monitoring apparatus 1 via the local-monitor-screen-  
35 interface unit 26, resulting in the local-monitor-  
screen-display applet 14B displaying the status  
change on the local monitor screen 11B of the

0057457 052400

central monitoring apparatus 1.

In this manner, the present invention stores data indicative of the predetermined severity level in the central monitoring apparatus 1 and the  
5 local monitoring apparatus 2, and determines based on the predetermined severity level whether a status change is to be reflected by the local monitor screen 11B of the central monitoring apparatus 1. The present invention can thus narrow a range of  
10 items displayed on the central monitor screen 11A and the local monitor screen 11B of the central monitoring apparatus 1.

The central monitoring apparatus 1 simultaneously monitors a plurality of local  
15 monitoring apparatuses 2. It is difficult, however, to display all the status-change information received from the local monitoring apparatuses 2. Use of a severity level threshold makes it possible to display only the items of an urgent nature. In  
20 this configuration, the local monitor screen 11B of the central monitoring apparatus 1 displays status-change information that have severity levels higher than the predetermined severity-level threshold set by the central monitoring apparatus 1, whereas the  
25 local monitor screen 21 of the local monitoring apparatus 2 displays status-change information unaffected by the severity-level threshold.

In the following, a description will be given with regard to recordation of control  
30 operation in the local monitoring apparatus and in the central monitoring apparatus.

As shown in Fig.28, the local monitoring apparatus 2 includes a setting/control-processing unit 28. The setting/control-processing unit 28  
35 receives data of control operation performed by the central monitoring apparatus 1 from the local-monitor-screen-display applet 14B of the central

004250 294650



monitoring apparatus 1 via the local-monitor-screen-interface unit 26 of the local monitoring apparatus 2, and sends the data to a communication apparatus.

The setting/control-processing unit 28  
5 also receives a response to the control operation when it is sent from the communication apparatus. The setting/control-processing unit 28 sends the data of control operation and the response thereto to the operation recording unit 23. The operation  
10 recording unit 23 stores the data of control operation and the response thereto in a control-history unit 231 of the local monitoring apparatus 2. Further, the setting/control-processing unit 28 checks whether the control operation was carried out  
15 by the local monitoring apparatus 2 or carried out by the central monitoring apparatus 1. If it was carried out by the central monitoring apparatus 1, the setting/control-processing unit 28 sends the data of control operation and the response thereto  
20 to a setting/control-processing unit 18 of the central monitoring apparatus 1.

The setting/control-processing unit 18 of the central monitoring apparatus 1 forwards the data of control operation and the response thereto to the  
25 operation recording unit 13 of the central monitoring apparatus 1. The operation recording unit 13 stores the data of control operation and the response thereto in a control-history unit 131.

In this manner, even if the control  
30 operation is performed on the local monitor screen 11B of the central monitoring apparatus 1, it is the local monitoring apparatus 2 which performs actual control processing directed to the local monitoring apparatus 2 or to the communication apparatuses 3<sub>11</sub>  
35 through 3<sub>nm</sub>. History information on the control operation and the response thereto, however, are transmitted from the local monitoring apparatus 2 to

004250" 4942560

5 monitoring apparatus 1. This configuration makes it possible to record every operation performed by the central monitoring apparatus 1.

10                   As shown in Fig.11, the local monitoring  
apparatus 2 includes a Web server 271, a Web browser  
272, and the operation recording unit 23. The  
operation recording unit 23 performs a function of  
recording operation history regarding control  
15 operations, option-setting operations, etc.

The local monitoring apparatus 2 further includes the local-monitor-screen-display applet 24 (14B), which provides functions of displaying the local monitor screen 21 (11B) and interacting with an administrator when the administrator performs various operations. The local-monitor-screen-display applet is initially stored in a hard-drive of the local monitoring apparatus 2, and is activated by the Web server 271 and the Web browser 272 or 172 in response to a user operation for displaying a local monitor screen on the local monitoring apparatus 2 or on the central monitoring apparatus 1. If the user operation for displaying a screen is performed on the local monitoring apparatus 2, the local-monitor-screen-display applet 24 runs on the local monitoring apparatus 2. If the user operation for displaying a screen is performed on the central monitoring apparatus 1, the local-monitor-screen-display applet 14B runs on the central monitoring apparatus 1.

An applet is a program written in Java codes, and is downloaded from a Web server to a Web

browser when it is to be used. The reason why  
applets are used for the display purpose in the  
preferred embodiments of the present invention is  
that use of applets makes it possible for an  
5 apparatus to display and let a user operate on a  
remote screen. In this configuration, therefore,  
the central monitoring apparatus can provide  
monitor-and-control interface that is the same as  
that used with screens displayed on the local  
10 monitoring apparatus.

With reference to Fig.11 again, the  
setting/control-processing unit 28 provides a  
function of receiving setting/control operation  
performed by an administrator and a function of  
15 carrying out relevant setting/control processing.  
Further, the setting/control-processing unit 28  
stores a predetermined severity-level threshold that  
is informed by the central monitoring apparatus 1.  
The local-monitor-screen-interface unit 26 provides  
20 interface between the local-monitor-screen-display  
applet 24 or 14B and various units of the local  
monitoring apparatus 2.

When receiving a request from the local-  
monitor-screen-display applet 24 or 14B, the local-  
25 monitor-screen-interface unit 26 transfers the  
request to a relevant processing unit within the  
local monitoring apparatus 2. When receiving a  
response to the request from a processing unit of  
the local monitoring apparatus 2, the local-monitor-  
30 screen-interface unit 26 transfers the response to  
either the local monitoring apparatus 2 or the  
central monitoring apparatus 1 that issued the  
request. Upon receiving a message from a processing  
unit of the local monitoring apparatus 2, the local-  
35 monitor-screen-interface unit 26 forwards the  
message to the local-monitor-screen-display applet  
24 or 14B.

004250 2342560

The detailed-event processing unit 22 provides a function of controlling a current monitor status and a status change of each monitored item with respect to each communication apparatus, and, also, provides a function of controlling a status change in the summary information collected for a given area that is under the control of the local monitoring apparatus 2.

When the detailed-event processing unit 22 detects a status change of a monitored item in response to an event message sent from the communication apparatuses  $3_{11}$  through  $3_{nm}$ , the detailed-event processing unit 22 sends a message indicative of the status change to the local-monitor-screen-display applet 24 or 14B. When detecting a status change in the summary information regarding the local area that is under the control of the local monitoring apparatus 2, the detailed-event processing unit 22 sends a message indicative of the status change to the central monitoring apparatus 1.

Moreover, the detailed-event processing unit 22 receives a request for transfer of current monitor statuses and status changes when the request is sent from the local-monitor-screen-display applet 24 or 14B. Upon receipt of the request, the detailed-event processing unit 22 sends requested information to the local-monitor-screen-display applet 24 or 14B. Management and control in this operation are attended to by using the status-change-information tables 221 and 222 and a current-status-information table 223.

The current-status-information table 223 is used for controlling a current status ("present" or "recovered") of each monitored item with respect to each communication apparatus. The current-status-information table 223 is updated by the

004250 2942550

5

10

30

35

monitoring apparatus 1 and the processing units of  
the local monitoring apparatus 2. The central-  
monitoring-apparatus-interface unit 251 forwards  
information to the central monitoring apparatus 1  
5 when receiving the information from a processing  
unit of the local monitoring apparatus 2, and  
forwards what is received from the central  
monitoring apparatus 1 to a relevant processing unit  
of the local monitoring apparatus 2. When  
10 information received from the central monitoring  
apparatus 1 is a request for option setting or a  
request for control operation, this information is  
forwarded to the setting/control-processing unit 28.  
If information received from the central monitoring  
15 apparatus 1 is a message of operation monitoring, it  
is sent to the detailed-event processing unit 22.

An operation-management unit 29 receives  
data of start operation performed by an  
administrator, and informs the detailed-event  
20 processing unit 22 of a start of status-change  
monitoring operation that is commenced in response  
to the administrator's start operation.

Fig.12 is a block diagram showing  
functions of the central monitoring apparatus 1.  
25 As shown in Fig.12, the central monitoring  
apparatus 1 includes a Web server 171, a Web browser  
172, and the operation recording unit 13. The  
operation recording unit 13 performs a function of  
recording operation history regarding control  
30 operations, option-setting operations, etc.,  
performed by an administrator of the central  
monitoring apparatus 1.

The central-monitor-screen-display applet  
14A serves to display the central monitor screen 11A  
35 and interact with an administrator when the  
administrator performs various operations. The  
central-monitor-screen-display applet 14A is

initially stored in a hard-drive of the central monitoring apparatus 1, and is activated by the Web server 171 and the Web browser 172 in response to a user operation performed for the purpose of  
5 displaying the central monitor screen 11A. The setting/control-processing unit 18 provides a function of receiving setting/control operation performed by an administrator, and further provides a function of carrying out relevant setting/control  
10 processing.

The central-monitor-screen-interface unit 16 provides interface between the central-monitor-screen-display applet 14A and various units of the central monitoring apparatus 1. When receiving a  
15 request from the central-monitor-screen-display applet 14A, the central-monitor-screen-interface unit 16 transfers the request to a relevant processing unit within the central monitoring apparatus 1. When receiving a response to the  
20 request from a processing unit of the central monitoring apparatus 1, the central-monitor-screen-interface unit 16 transfers the response to the central-monitor-screen-display applet 14A.

The summary-event processing unit 12  
25 provides a function of controlling a current monitor status and a status change of each local area. When the summary-event processing unit 12 detects a status change of a monitored status based on an event message sent from a communication apparatus,  
30 the summary-event processing unit 12 sends a message indicative of the status change to the central-monitor-screen-display applet 14A. When receiving a request for transfer of current monitor statuses and status changes from the central-monitor-screen-  
35 display applet 14A, the summary-event processing unit 12 sends requested information to the central-monitor-screen-display applet 14A.

004250 294250

Management and control of this operation are attained based on the status-change-summary table 121 and a current-status-summary table 123. The current-status-summary table 123 is used for  
5 controlling a current status of each local area. The current-status-summary table 123 is updated by the summary-event processing unit 12 each time a message indicative of status change is received from the local monitoring apparatus 2. When the central  
10 monitor screen 11A is displayed for the first time, the current-status-summary table 123 is referred to in order to determine a display color for each area icon 11A-1.

The status-change-summary table 121 is  
15 used to monitor and control a time of occurrence of a status change, a nature of a status change ("present" or "recovered"), etc., with respect to each local area. Generation of the status-change-summary table 121 is attended to by the summary-  
20 event processing unit 12 at the time of a start of operation when the operation is launched by an administrator. Thereafter, each time the local monitoring apparatus 2 sends a message indicative of status change, the summary-event processing unit 12  
25 updates the status-change-summary table 121 accordingly. When an administrator performs a confirmation operation, the status changes that are confirmed are removed from the status-change-summary table 121.

30 A local-monitoring-apparatus-interface unit 151 provides interface between the local monitoring apparatus 2 and the processing units of the central monitoring apparatus 1. When  
35 information received from the local monitoring apparatus 2 is a message indicative of status change, the local-monitoring-apparatus-interface unit 151 forwards the event message to the summary-event

004250 194456



processing unit 12.

The setting/control-processing unit 18 provides functions of receiving setting/control operation performed by an administrator and of  
5 carrying out relevant setting/control processing. Further, the setting/control-processing unit 18 receives a severity-level threshold from the central-monitor-screen-display applet 14A via the central-monitor-screen-interface unit 16, and stores  
10 the severity-level threshold in a severity-level-setting unit (not shown).

An operation-management unit 19 receives data of a start operation performed by an administrator, and informs the summary-event  
15 processing unit 12 of a start of status-change monitoring operation that is commenced in response to the administrator's start operation. Further, the operation-management unit 19 reports the start of status-change monitoring operation to the  
20 detailed-event processing unit 22 of the local monitoring apparatus 2 via the local-monitoring-apparatus-interface unit 151.

Fig.13 is a process flow of a process performed by the local monitoring apparatus at a  
25 time of a start of operation.

When detecting a monitoring-start operation performed by an administrator on the local monitoring apparatus 2 (step ST1), the operation-management unit 29 informs the detailed-event  
30 processing unit 22 of a start of monitoring operation (step ST2).

Having received the message indicative of a start of monitoring operation from the operation-management unit 29, the detailed-event processing  
35 unit 22 generates the status-change-information table 222 for a local monitoring apparatus (step ST3). Thereafter, when a status change occurs, the

004250" 294250

status-change-information table 222 will be updated, indicating an ongoing status of local monitoring operation.

Fig.14 is a process flow of a process performed at a time when a start operation is carried out on the central monitoring apparatus.

When detecting a monitoring-start operation performed by an administrator on the central monitoring apparatus 1 (step ST1), the operation-management unit 19 informs the summary-event processing unit 12 of a start of monitoring operation (step ST2-A), and, also, notifies the local monitoring apparatus 2 of the start of monitoring operation by sending a notice via the local-monitoring-apparatus-interface unit 151 (steps ST2-B and ST3-B). In response to the message received from the operation-management unit 19, the summary-event processing unit 12 generates the status-change-summary table 121 (step ST3-A).

Having received the notice from the central monitoring apparatus 1 through the central-monitoring-apparatus-interface unit 251 (step ST4), the detailed-event processing unit 22 of the local monitoring apparatus 2 generates the status-change-information table 221 for a central monitoring apparatus (step ST5). Thereafter, when a status change occurs, the status-change-information table 221 for a central monitoring apparatus and the status-change-summary table 121 will be updated, indicating an ongoing status of central monitoring operation.

Once the central monitoring apparatus 1 and the local monitoring apparatus 2 are engaged in operation, the status-change-summary table 121 is generated in the central monitoring apparatus 1. In the local monitoring apparatus 2, further, the status-change-information table 222 and the status-

change-information table 221 are generated separately for the local monitoring apparatus 2 and the central monitoring apparatus 1.

Fig.15 is a process flow of a process performed by the local monitoring apparatus at a time when an operator operation for displaying a local-monitoring screen is carried out.

In the local monitoring apparatus 2, the Web browser 272 detects an operator operation for displaying a local monitor screen (step ST1), and requests the Web server 271 to display the local monitor screen (step ST2).

In response to the request, the Web server 271 reads the local-monitor-screen-display applet 24 and an HTML file defining the local monitor screen 21 (step ST3), and hands them to the Web browser 272 (step ST4). Having received the local-monitor-screen-display applet 24, the Web browser 272 activates the local-monitor-screen-display applet 24 (step ST5).

The local-monitor-screen-display applet 24 activated by the Web browser 272 sends a request message to the local-monitor-screen-interface unit 26 (step ST6), requesting current statuses and status changes that are necessary for the displaying of the local monitor screen 21.

In response to the request message, the local-monitor-screen-interface unit 26 forwards the request to the detailed-event processing unit 22 (step ST6'). Upon receiving the request, the detailed-event processing unit 22 reads the current-status-information table 223 and the status-change-information table 222 for a local monitoring apparatus (step ST7). The detailed-event processing unit 22 sends these tables to the local-monitor-screen-interface unit 26 as a response to the request (step ST8). Having received the response,

the local-monitor-screen-interface unit 26 forwards the response to the local-monitor-screen-display applet 24 (step ST8').

Based on the response, the local-monitor-screen-display applet 24 selects a display color of a communication-apparatus icon 21-1 having an alarm on the local monitor screen 21 such that the display color corresponds to the highest severity level among various severity levels observed in the corresponding communication apparatus, and, also, makes the communication-apparatus icon 21-1 start flickering (step ST9).

Fig.16 is a process flow of a process performed at a time when an operator operation to display a local monitor screen is carried out on the central monitoring apparatus.

In the central monitoring apparatus 1, the Web browser 172 detects an operator operation for displaying a local monitor screen (step ST1). The Web browser 172 requests the Web server 271 of the local monitoring apparatus 2 to display the local monitor screen (step ST2).

In response to the request, the Web server 271 of the local monitoring apparatus 2 reads the local-monitor-screen-display applet 14B and an HTML file defining the local monitor screen 11B (step ST3), and hands them to the Web browser 172 of the central monitoring apparatus 1 (step ST4).

The Web browser 172 of the central monitoring apparatus 1 downloads the local-monitor-screen-display applet 14B and the HTML file defining the local monitor screen 11B, and, then, activates the local-monitor-screen-display applet 14B. The local-monitor-screen-display applet 14B of the central monitoring apparatus 1 activated by the Web browser 172 sends a request message to the local-monitor-screen-interface unit 26 (step ST6),

requesting information necessary to display the local monitor screen 11B.

In response to the request message, the local-monitor-screen-interface unit 26 forwards the request to the detailed-event processing unit 22 (step ST6'). Upon receiving the request, the detailed-event processing unit 22 reads the current-status-information table 223 and the status-change-information table 221 for a central monitoring apparatus (step ST7). The detailed-event processing unit 22 sends these tables to the local-monitor-screen-interface unit 26 as a response to the request (step ST8). Having received the response, the local-monitor-screen-interface unit 26 forwards the response to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 (step ST8').

Based on the response, the local-monitor-screen-display applet 14B selects a display color of a communication-apparatus icon 11B-1 having an alarm on the local monitor screen 11B such that the display color corresponds to the highest severity level among various severity levels observed in the corresponding communication apparatus, and, also, makes the communication-apparatus icon 11B-1 start flickering (step ST9).

Fig.17 is a process flow of a process performed by the central monitoring apparatus at a time when an operator operation to display a central monitor screen is carried out.

In the central monitoring apparatus 1, the Web browser 172 detects an operator operation for displaying a central monitor screen (step ST1), and requests the Web server 171 to display the central monitor screen (step ST2).

In response to the request, the Web server 171 reads the central-monitor-screen-display applet

5

10

15

30

35

Upon detecting a status change of a

monitored item, a communication apparatus sends an event message indicative of the status change to the local monitoring apparatus 2 (step ST1).

Having received the event message through  
5 the communication-apparatus-interface unit 252, the detailed-event processing unit 22 checks whether there is a status change. If there is a status change in a monitored item, the detailed-event processing unit 22 updates the status-change-  
10 information tables 221 and 222 as well as the current-status-information table 223 (step ST3). Further, the detailed-event processing unit 22 sends an event message to the local-monitor-screen-display applet 24 and 14B through the local-monitor-screen-  
15 interface unit 26 (steps ST4-A and ST4-B). Further, the detailed-event processing unit 22 sends an event message to the central monitoring apparatus 1 via the central-monitoring-apparatus-interface unit 251 (step ST4-C) if there is a change in summary  
20 information summarizing statuses of the monitored local area.

Upon receiving the event message from the local-monitor-screen-interface unit 26, each of the local-monitor-screen-display applets 24 and 14B  
25 changes a display color of a communication-apparatus icon of a communication apparatus that is experiencing the status change, so that the display color reflects the received status-change information (steps ST5-A and ST5-B). Further, the  
30 local-monitor-screen-display applets 24 and 14B make the respective icons flicker (steps ST5-A and ST5-B).

Having received the event message through the local-monitoring-apparatus-interface unit 151 (step ST5-C), the summary-event processing unit 12  
35 updates the current-status-summary table 123 and the status-change-summary table 121 (step ST6), and sends an event message to the central-monitor-

004250 294460

screen-display applet 14A through the central-monitor-screen-interface unit 16 (steps ST7 and ST7').

In response to the event message, the  
5 central-monitor-screen-display applet 14A changes a  
display color of the area icon 11A-1 of an area that  
is experiencing the status change, so that the  
display color reflects the reported status-change  
information. Further, the central-monitor-screen-  
10 display applet 14A makes the icon flicker (step ST8).

Fig.19 is a process flow of a process  
performed by the local monitoring apparatus when an  
operator operation to display a status-change-  
information list is performed.

15 The local-monitor-screen-display applet 24  
of the local monitoring apparatus 2 detects a click  
on the list-display button 21-2 (step ST1), and  
sends a request for transfer of status-change  
information to the detailed-event processing unit 22  
20 via the local-monitor-screen-interface unit 26  
(steps ST2 and ST3).

Having received the request for transfer  
of status-change information, the detailed-event  
processing unit 22 reads status-change information  
25 from the status-change-information table 222 for a  
local monitoring apparatus (step ST4), and sends the  
status-change information, as a response, to the  
local-monitor-screen-display applet 24 via the  
local-monitor-screen-interface unit 26 (steps ST5  
30 and ST6). Upon receiving the response, the local-  
monitor-screen-display applet 24 displays the  
received status-change information on the list  
screen 21-3 (step ST7).

Fig.20 is a process flow of a process  
35 performed when an operator operation to display a  
status-change-information list is performed with  
respect to a local monitor screen of the central

004250 2944560



monitoring apparatus.

The local-monitor-screen-display applet 14B of the central monitoring apparatus 1 detects a click on the list-display button 11B-2 associated with the local monitor screen 11B of the central monitoring apparatus 1 (step ST1), and sends a request for transfer of status-change information to the detailed-event processing unit 22 of the local monitoring apparatus 2 via the local-monitor-screen-interface unit 26 of the local monitoring apparatus 2 (steps ST2 and ST3).

Having received the request for transfer of status-change information from the central monitoring apparatus 1, the detailed-event processing unit 22 reads status-change information from the status-change-information table 221 for a central monitoring apparatus (step ST4), and sends the status-change information, as a response, to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the local-monitor-screen-interface unit 26 (steps ST5 and ST6). Upon receiving the response, the local-monitor-screen-display applet 14B displays the received status-change information on the list screen 11B-3 (step ST7).

Fig.21 is a process flow of a process performed by the central monitoring apparatus when an operator operation to display a status-change-information list is performed with respect to the central monitor screen.

The central-monitor-screen-display applet 14A of the central monitoring apparatus 1 detects a click on the list-display button (step ST1), and sends a request for transfer of status-change information to the summary-event processing unit 12 via the central-monitor-screen-interface unit 16 (steps ST2 and ST3).

004250 294650

Having received the request for transfer of status-change information, the summary-event processing unit 12 reads status-change information from the status-change-summary table 121 (step ST4),  
5 and sends the status-change information, as a response, to the central-monitor-screen-display applet 14A via the central-monitor-screen-interface unit 16 (steps ST5 and ST6). Upon receiving the response, the central-monitor-screen-display applet  
10 14A displays the received status-change information on the list screen 11A-3 (step ST7).

Fig.22 is a process flow of a process performed by the local monitoring apparatus when a confirmation operation is performed on the local  
15 monitoring apparatus.

The local-monitor-screen-display applet 24 of the local monitoring apparatus 2 detects a click on the confirmation button 21-33 of the list screen 21-3 (step ST1), and sends a confirmation-process  
20 request to the detailed-event processing unit 22 via the local-monitor-screen-interface unit 26 (steps ST2 and ST3).

Having received the confirmation-process request, the detailed-event processing unit 22  
25 erases relevant status-change information from the status-change-information table 222 for a local monitoring apparatus (step ST4), and sends a response acknowledging the confirmation to the local-monitor-screen-display applet 24 via the  
30 local-monitor-screen-interface unit 26 (steps ST5 and ST6).

Upon receiving the response, the local-monitor-screen-display applet 24 erases the confirmed status-change information from the  
35 displayed list, and stops flickering of the communication-apparatus icon 21-1 for which status changes are all confirmed.

004250 294460

Fig.23 is a process flow of a process performed when a confirmation operation is performed on a local monitor screen of the central monitoring apparatus.

5           The local-monitor-screen-display applet 14B detects a click on the confirmation button 11B-33 of the list screen 11B-3 (step ST1), and sends a request to the detailed-event processing unit 22 of the local monitoring apparatus 2 via the local-  
10 monitor-screen-interface unit 26 of the local monitoring apparatus 2, requesting a confirmation process to be performed (steps ST2 and ST3).

          Upon receiving the request for a confirmation process, the detailed-event processing  
15 unit 22 erases relevant status-change information from the status-change-information table 221 for the central monitoring apparatus in accordance with the contents of the request (step ST4). Further, the detailed-event processing unit 22 sends a response  
20 acknowledging the status-change confirmation to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the local-monitor-screen-interface unit 26 (steps ST4' and ST5-A), and sends a message indicative of status-  
25 change confirmation to the central monitoring apparatus 1 via the central-monitoring-apparatus-interface unit 251 (step ST5-B).

          Having received the response acknowledging the status-change confirmation, the local-monitor-  
30 screen-display applet 14B erases the confirmed information from the list screen 11B-3 showing status-change information, and stops flickering of a communication-apparatus icon that represents a communication apparatus for which status changes are  
35 all confirmed (step ST6-A).

          Having received the message indicative of status-change confirmation via the local-monitoring-

004250" 2944560

apparatus-interface unit 151 (step ST6-B), the  
summary-event processing unit 12 erases the  
confirmed status-change information from the status-  
change-summary table 121 in accordance with the  
5 contents of the message (step ST7), and sends a  
message indicative of status-change confirmation to  
the central-monitor-screen-display applet 14A via  
the central-monitor-screen-interface unit 16 (steps  
ST8 and ST8').

10 In response to the message indicative of  
status-change confirmation, the central-monitor-  
screen-display applet 14A erases the confirmed  
status-change information from the list screen 11A-3  
showing status-change information, and stops  
15 flickering of an area icon 11A-1 for which status  
changes are all confirmed (step ST9).

Fig.24 is a process flow of a process  
performed when a confirmation operation is performed  
on the central monitor screen of the central  
20 monitoring apparatus.

The central-monitor-screen-display applet  
14A detects a click on the confirmation button 11A-  
33 of the list screen 11A-3 (step ST1), and sends a  
request to the summary-event processing unit 12 via  
25 the central-monitor-screen-interface unit 16 so as  
to request a confirmation process to be performed  
(steps ST2 and ST2').

Upon receiving the request for a  
confirmation process, the summary-event processing  
30 unit 12 erases relevant status-change information  
from the status-change-summary table 121 in  
accordance with the contents of the request (step  
ST3). Further, the summary-event processing unit 12  
sends a response acknowledging the status-change  
35 confirmation to the central-monitor-screen-display  
applet 14A via the central-monitor-screen-interface  
unit 16 (steps ST4 and ST4'), and sends a message

indicative of status-change confirmation to the local monitoring apparatus 2 via the local-monitoring-apparatus-interface unit 151 (steps ST5-B and ST5-C).

5           Having received the response acknowledging the status-change confirmation, the central-monitor-screen-display applet 14A erases the confirmed information from the list screen 11A-3 showing status-change information, and stops flickering of  
10 an area icon 11A-1 for which status changes are all confirmed (step ST5-A).

          Having received the message indicative of status-change confirmation from the central monitoring apparatus 1 via the central-monitoring-apparatus-interface unit 251, the detailed-event  
15 processing unit 22 erases the confirmed status-change information from the status-change-information table 221 for the central monitoring apparatus in accordance with the contents of the  
20 message (step ST7-A), and sends a message indicative of status-change confirmation to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 via the local-monitor-screen-interface unit 26 (steps ST7-B and ST8).

25           In response to the message indicative of status-change confirmation, the local-monitor-screen-display applet 14B of the central monitoring apparatus 1 erases the confirmed status-change information from the list screen 11B-3 that shows  
30 status-change information in association with the local monitor screen 11B, and stops flickering of a communication-apparatus icon 11B-1 that represents a communication apparatus for which status-change information is all confirmed (step ST9).

35           Fig.25 is a process flow of a process performed when operation for making a setting to a threshold severity level is performed.

004250 294250

When an administrator of the central monitoring apparatus 1 performs an operation for setting a threshold severity level (step ST1), the central-monitor-screen-display applet 14A sends a severity-setting request to the setting/control-processing unit 18 via the central-monitor-screen-interface unit 16 (steps ST2 and ST3).

The setting/control-processing unit 18 of the central monitoring apparatus 1 updates a threshold severity level in accordance with the severity-setting request, and stores the threshold severity level in the threshold-severity-level storage unit 181 (step ST4). Further, the setting/control-processing unit 18 sends a message indicative of setting of a threshold severity level to the local monitoring apparatus 2 via the local-monitoring-apparatus-interface unit 151 (steps ST5 and ST6).

Having received the message from the central monitoring apparatus 1 via the central-monitoring-apparatus-interface unit 251 (step ST7), the setting/control-processing unit 28 of the local monitoring apparatus 2 updates a threshold severity level of the local monitoring apparatus 2 in accordance with the severity-setting request, and stores the threshold severity level in the threshold-severity-level storage unit 281 (step ST8).

Fig.26 is a process flow of a process performed in response to a status change when there is a setting to a threshold severity level.

Upon receiving an event message, the detailed-event processing unit 22 of the local monitoring apparatus 2 consults the threshold severity level stored in the threshold-severity-level storage unit 281. If a severity level of the reported status change is lower than the threshold severity level, no event message is transmitted to

the central monitoring apparatus 1.

When an administrator of the local monitoring apparatus sets a threshold severity level for controlling display of the local monitor screen, a threshold severity level is stored in a local-monitoring-apparatus threshold-severity-level storage unit (not shown). Accordingly, threshold-severity levels are stored separately for the central monitoring apparatus and for the local monitoring apparatus. Display of the local monitor screen on the local monitoring apparatus is controlled according to the threshold severity level of the local monitoring apparatus, and display of the central monitor screen of the central monitoring apparatus is controlled according to the threshold severity level of the central monitoring apparatus.

When receiving an event message from the detailed-event processing unit 22, the local-monitor-screen-interface unit 26 refers to the threshold severity level stored in the threshold-severity-level storage unit 281. If a severity level of the reported status change is lower than the threshold severity level, no event message is transmitted to the local-monitor-screen-display applet 14B of the central monitoring apparatus 1.

Fig.27 is a process flow of a process performed when a control operation is performed on the local monitor screen of the local monitoring apparatus.

Upon detecting a control operation performed by an administrator of the local monitoring apparatus 2 (step ST1), the local-monitor-screen-display applet 24 sends a control-operation message to the setting/control-processing unit 28 via the local-monitor-screen-interface unit 26 (steps ST2 and ST3).

Upon receiving the control-operation

095746 052400  
004250 494450

message, the setting/control-processing unit 28  
sends a control request to a relevant communication  
apparatus via the communication-apparatus-interface  
unit 252 (steps ST4-A and ST5-A), and sends a  
5 control-operation message to the operation recording  
unit 23 (step ST4-B). Since the control-operation  
message originates from the local monitoring  
apparatus 2, the operation recording unit 23 updates  
operation history stored in the operation history  
10 unit 232 dedicated for a local monitoring apparatus  
(step ST5-B)

Fig.28 is a process flow of a process  
performed when a control operation is performed on  
the local monitor screen of the central monitoring  
15 apparatus.

Upon detecting a control operation  
performed by an administrator (step ST1), the local-  
monitor-screen-display applet 14B of the central  
monitoring apparatus 1 sends a control-operation  
20 message to the setting/control-processing unit 28 of  
the local monitoring apparatus 2 via the local-  
monitor-screen-interface unit 26 (steps ST2 and ST3).

Upon receiving the control-operation  
message, the setting/control-processing unit 28  
25 forwards the control-operation message to a relevant  
communication apparatus via the communication-  
apparatus-interface unit 252 (steps ST4-A and ST5-A),  
and, also, forwards the control-operation message to  
the operation recording unit 23 (step ST4-B). Since  
30 the control-operation message originates from the  
central monitoring apparatus 1, the operation  
recording unit 23 updates operation history stored  
in the operation history unit 231 dedicated for the  
central monitoring apparatus (step ST5-B)

35 Further, the setting/control-processing  
unit 28 sends a control-operation message to the  
central monitoring apparatus 1 via the central-

0057467 05400  
004250" 29424560



monitoring-apparatus-interface unit 251 (step ST5-B).  
In the central monitoring apparatus 1, the  
setting/control-processing unit 18 receives the  
control-operation message from the local-monitoring-  
5 apparatus-interface unit 151 (step ST6), and  
forwards the control-operation message to the  
operation recording unit 13 (step ST7). In  
accordance with the received control-operation  
message, the operation recording unit 13 updates  
10 operation history stored in the operation history  
unit 131.

In the embodiments described above, a  
monitor screen is not limited to what is shown on a  
display device, but can be any types of visual  
15 outputs including, for example, a printout from a  
printer.

Further, the present invention is not  
limited to application to a multi-level management  
system comprised of a central monitoring apparatus  
20 and local monitoring apparatuses, but is also  
applicable to a single-level management system  
comprised of a plurality of monitoring devices  
communicating with each other to monitor  
communication apparatuses. In such a case, the  
25 present invention can be used as a means to manage  
and control monitored information between the  
plurality of monitoring devices.

Moreover, operation that should be  
reflected by information stored in the local  
30 monitoring apparatus is not limited to a  
confirmation operation or a control operation, but  
may include monitor operations such as modifying of  
information, marking of information, etc.

The present invention controls status-  
35 change information for the local monitor screens of  
the local monitoring apparatus separately from  
status-change information for the local monitor

0057467 052400  
004250 294250

0057467-05400

screens of the central monitoring apparatus. When a confirmation operation is performed on the local monitoring apparatus or on the central monitoring apparatus, an identification of the monitoring apparatus on which the operation is performed is attached to a message indicative of the confirmation operation. No matter whether the local monitoring apparatus is operated or the central monitoring apparatus is operated, the status-change information stored in the local monitoring apparatus is updated only with respect to the monitoring apparatus which was operated for confirmation. This makes sure that the local monitor screens of the other monitoring apparatuses are not affected by the confirmation operation, thereby insuring correct display of operation statuses.

Further, when a confirmation operation is carried out on the central monitoring apparatus, the status-change-summary information stored in the central monitoring apparatus is updated so as to keep the central monitor screen consistent with the current status, and a message is sent to the local monitoring apparatus to update the status-change information for the central monitoring apparatus stored in the local monitoring apparatus, thereby ensuring that the local monitor screens of the central monitoring apparatus are consistent with the central monitor screen of the central monitoring apparatus.

Further, use of ordinal numbers, which are given to status-change information independently within each classified group, makes it possible for an administrator to confirm the status-change information on a group-wise manner, thereby ensuring correct display of operation statuses. Further, when a restriction is placed to narrow a range of status-change information reported to the central

monitoring apparatus, in this regard, the local monitoring apparatus controls the status-change information for the central monitoring apparatus separately from the status-change information for the local monitoring apparatus. Namely, separate restrictions for narrowing a range can be used between the local monitoring apparatus and the central monitoring apparatus. Further, this configuration keeps consistency of display information between the local monitor screens and the central monitor screen on the central monitoring apparatus.

Moreover, the local monitoring apparatus can record operation history for the central monitoring apparatus separately from operation history for the local monitoring apparatus. This makes it possible to manage and control operation histories independently between the central monitoring apparatus and the local monitoring apparatus.

In a multi-level management system where local monitoring apparatuses handle detailed actual control processes and a central monitoring apparatus is responsible for management and control of the summary information, the present invention allows the central monitoring apparatus to manage and control detailed information as well as the summary information while achieving separate control of the status-change information and operation history between the central monitoring apparatus and the local monitoring apparatus, thereby making it possible to carry through system development separately and independently for the central monitoring apparatus and for the local monitoring apparatus, reducing the time and labor for the system development.

Further, the present invention is not

004250 294250

limited to these embodiments, but various variations and modifications may be made without departing from the scope of the present invention.

The present application is based on

- 5 Japanese priority application No. 11-184797 filed on June 30, 1999, with the Japanese Patent Office, the entire contents of which are hereby incorporated by reference.

095745 034409  
004230 294450

**WHAT IS CLAIMED IS**

5

1. A system for monitoring objects based on monitor information indicative of statuses of the objects, comprising:

10 a local monitoring apparatus configured to store therein a first set of the monitor information and a second set of the monitor information, to make the first set of the monitor information reflect an operation performed on said local monitoring apparatus, and to display the first set of the  
15 monitor information on said local monitoring apparatus; and

20 a central monitoring apparatus configured to make the second set of the monitor information reflect an operation performed on said central monitoring apparatus through communication with said local monitoring apparatus, and to display the second set of the monitor information on said central monitoring apparatus.

25

2. The system as claimed in claim 1, wherein said central monitoring apparatus is further  
30 configured to store therein a summary of the monitor information, to make the summary of the monitor information reflect an operation performed on said central monitoring apparatus, and to display the summary of the monitor information on said central  
35 monitoring apparatus.

004250" 2942560

3. The system as claimed in claim 1,  
wherein the operation performed on said local  
monitoring apparatus includes an operation which a  
user of said local monitoring apparatus performs to  
5 confirm contents of the monitor information  
displayed on the local monitoring apparatus, and the  
operation performed on said central monitoring  
apparatus includes an operation which a user of said  
central monitoring apparatus performs to confirm  
10 contents of the monitor information displayed on the  
central monitoring apparatus.

15  
4. The system as claimed in claim 2,  
wherein said central monitoring apparatus is  
configured to make the second set of the monitor  
information reflect an operation performed with  
20 respect to the monitor information displayed on the  
central monitoring apparatus as well as an operation  
performed with respect to the summary of the monitor  
information displayed on the central monitoring  
apparatus, and to make the summary of the monitor  
25 information reflect the operation performed with  
respect to the monitor information displayed on the  
central monitoring apparatus as well as the  
operation performed with respect to the summary of  
the monitor information displayed on the central  
30 monitoring apparatus.

35  
5. The system as claimed in claim 1,  
wherein said local monitoring apparatus is further  
configured to classify the monitor information into

004253 4944560

groups, and to give ordinal numbers to items of the monitor information, the numbers being counted within each of the classified groups.

5

6. The system as claimed in claim 1,  
wherein said central monitoring apparatus is further  
10 configured to allow a threshold severity level to be  
set and to send the threshold severity level to the  
local monitoring apparatus, and wherein said local  
monitoring apparatus is further configured to check  
whether an item of the monitor information has a  
15 severity level higher than the threshold severity  
level, and to store the item of the monitor  
information as part of the second set of the monitor  
information if the item of the monitor information  
has a severity level higher than the threshold  
20 severity level.

25 7. The system as claimed in claim 1,  
wherein said local monitoring apparatus is further  
configured to store therein a first operation  
history regarding operations performed on said local  
monitoring apparatus and to store therein a second  
30 operation history regarding operations performed on  
said central monitoring apparatus, and said central  
monitoring apparatus is further configured to store  
therein a third operation history regarding the  
operations performed on said central monitoring  
35 apparatus.

8. A monitoring apparatus for monitoring objects based on monitor information indicative of statuses of the objects, comprising:

5 a memory storage unit which stores therein a first set of the monitor information and a second set of the monitor information;

10 a processing unit which makes the first set of the monitor information reflect an operation performed on said monitoring apparatus, and makes the second set of the monitor information reflect an operation performed on another apparatus connected to said monitoring apparatus via a network;

15 an output unit which locally outputs the first set of the monitor information; and

a transmission unit which transmits the second set of the monitor information to said another apparatus via the network.

20

9. The monitoring apparatus as claimed in claim 8, wherein the operation performed on said monitoring apparatus includes an operation which a user performs to confirm contents of the monitor information that is locally output at said monitoring apparatus.

30

10. The monitoring apparatus as claimed in claim 9, wherein the processing unit erases the confirmed contents of the monitor information from the first set of the monitor information stored in said memory storage unit so as to make the first set of the monitor information reflect the operation

004250 294250



performed on said monitoring apparatus.

5

11. A monitoring apparatus for monitoring  
objects based on monitor information indicative of  
statuses of the objects, connected to a plurality of  
monitoring apparatuses each monitoring respective  
10 groups of the objects, obtaining the monitor  
information and a summary of the monitor information  
from each of the monitoring apparatuses, outputting  
the summary of the monitor information collectively  
for all the objects, and outputting the monitor  
15 information separately for each of the groups of the  
objects, comprising:

a memory storage unit which stores therein  
the summary of the monitor information; and

a processing unit which makes the summary  
20 of the monitor information, stored in the memory  
storage unit, reflect an operation performed on said  
monitoring apparatus, and sends a message to the  
plurality of monitoring apparatuses such that the  
plurality of monitoring apparatuses make the monitor  
25 information, stored in the plurality of monitoring  
apparatuses, reflect the operation performed on said  
monitoring apparatus.

30

12. The monitoring apparatus as claimed in  
claim 11, wherein the operation performed on said  
monitoring apparatus includes an operation which a  
35 user of said monitoring apparatus performs to  
confirm contents of the summary of the monitor  
information that is output at said monitoring

004250 494560

apparatus.

5

13. The monitoring apparatus as claimed in  
claim 11, wherein the processing unit erases the  
confirmed contents of the summary of the monitor  
information from the summary of the monitor  
10 information stored in said memory storage unit so as  
to make the summary of the monitor information  
reflect the operation performed on said monitoring  
apparatus.

004250" 2942560


**ABSTRACT OF THE DISCLOSURE**

A system for monitoring objects based on monitor information indicative of statuses of the objects includes a local monitoring apparatus  
5 configured to store therein a first set of the monitor information and a second set of the monitor information, to make the first set of the monitor information reflect an operation performed on the local monitoring apparatus, and to display the first  
10 set of the monitor information on the local monitoring apparatus, and a central monitoring apparatus configured to make the second set of the monitor information reflect an operation performed on the central monitoring apparatus through  
15 communication with the local monitoring apparatus, and to display the second set of the monitor information on the central monitoring apparatus.


004250 294250

FIG. 1

CENTRAL MONITORING APPARATUS 1

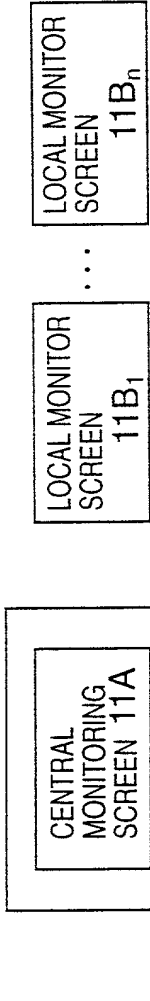

LOCAL MONITORING APPARATUS 2<sub>1</sub>



LOCAL MONITORING APPARATUS 2<sub>n</sub>




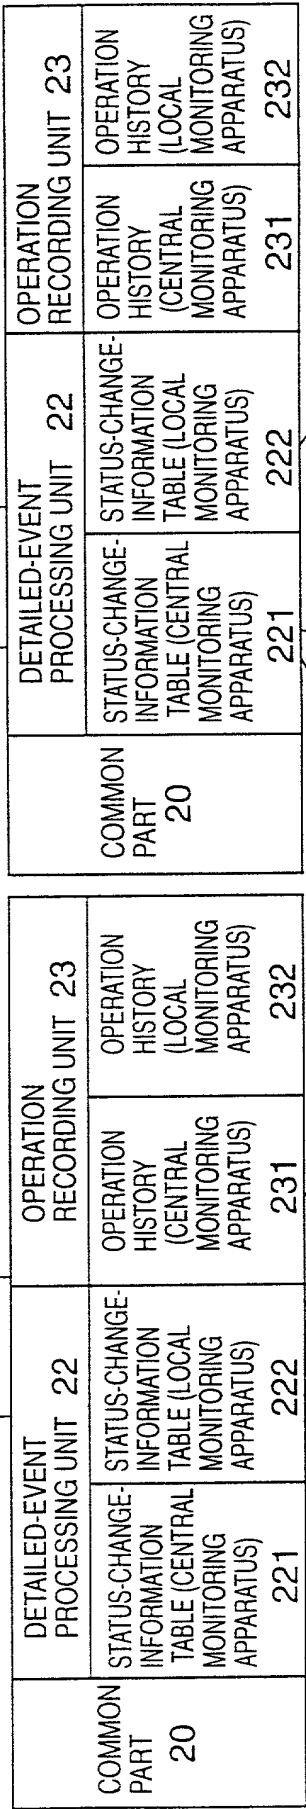


FIG. 2

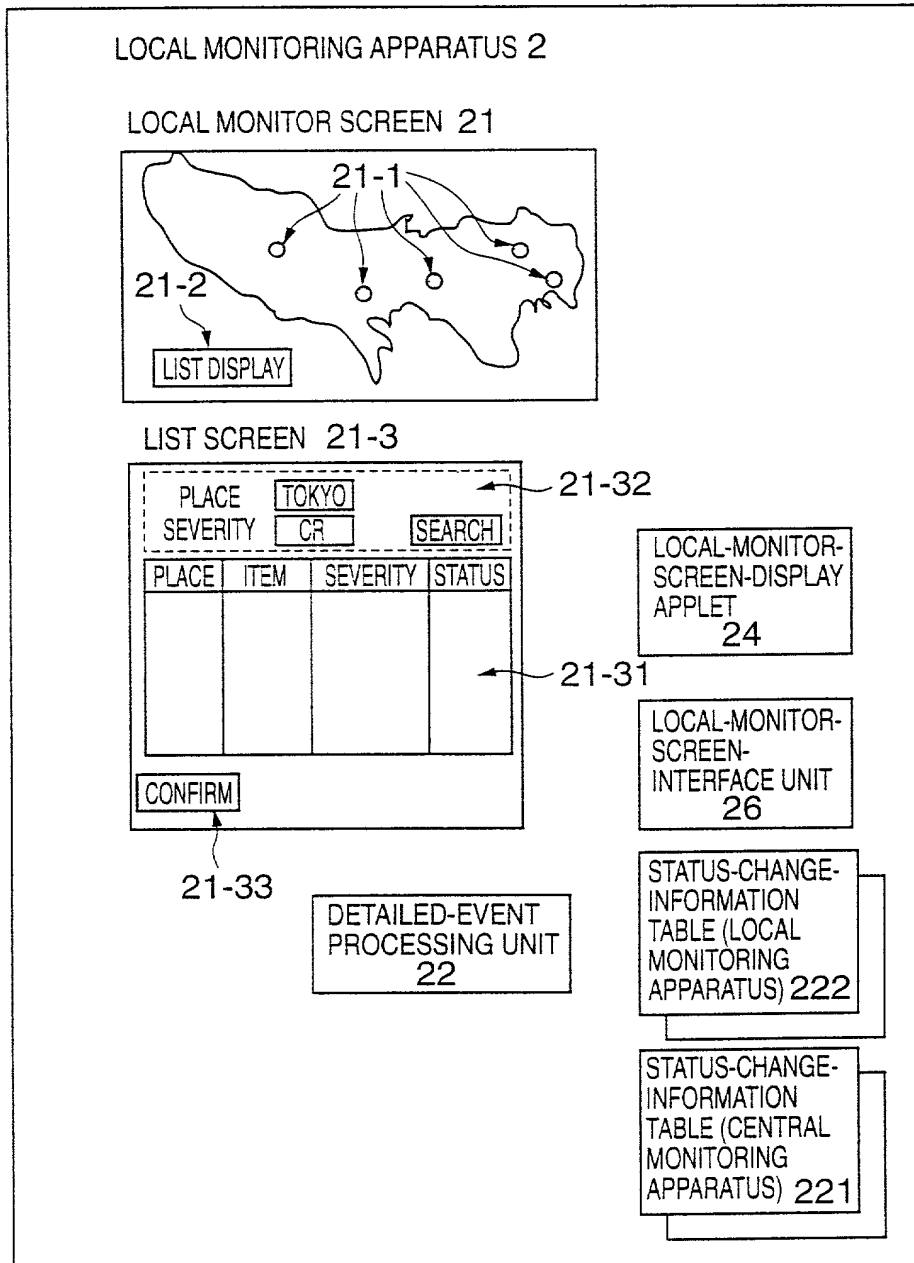

# FIG. 3

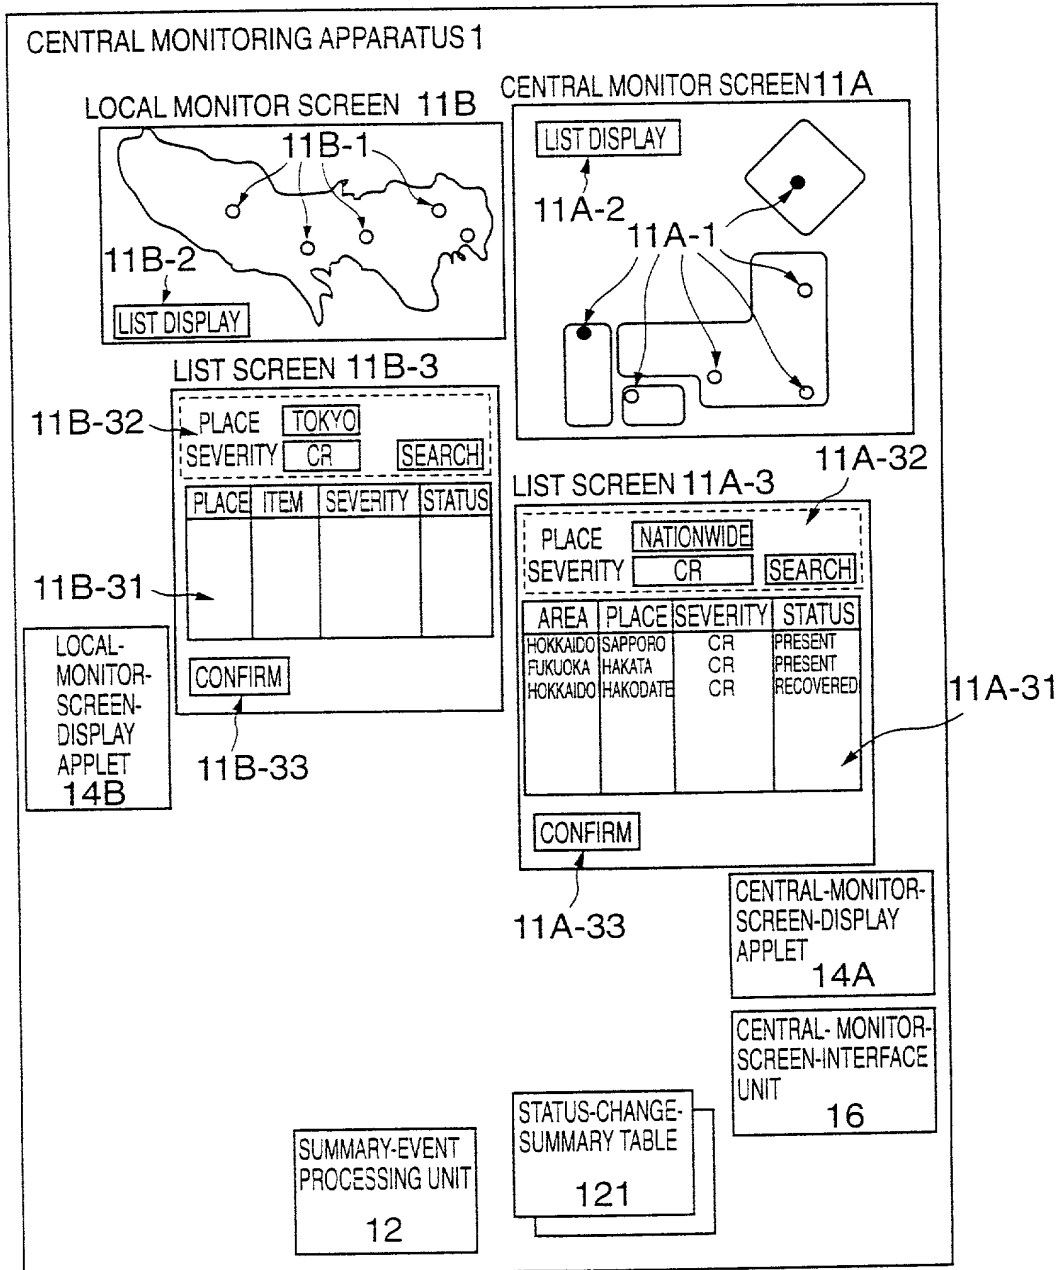

# FIG. 4



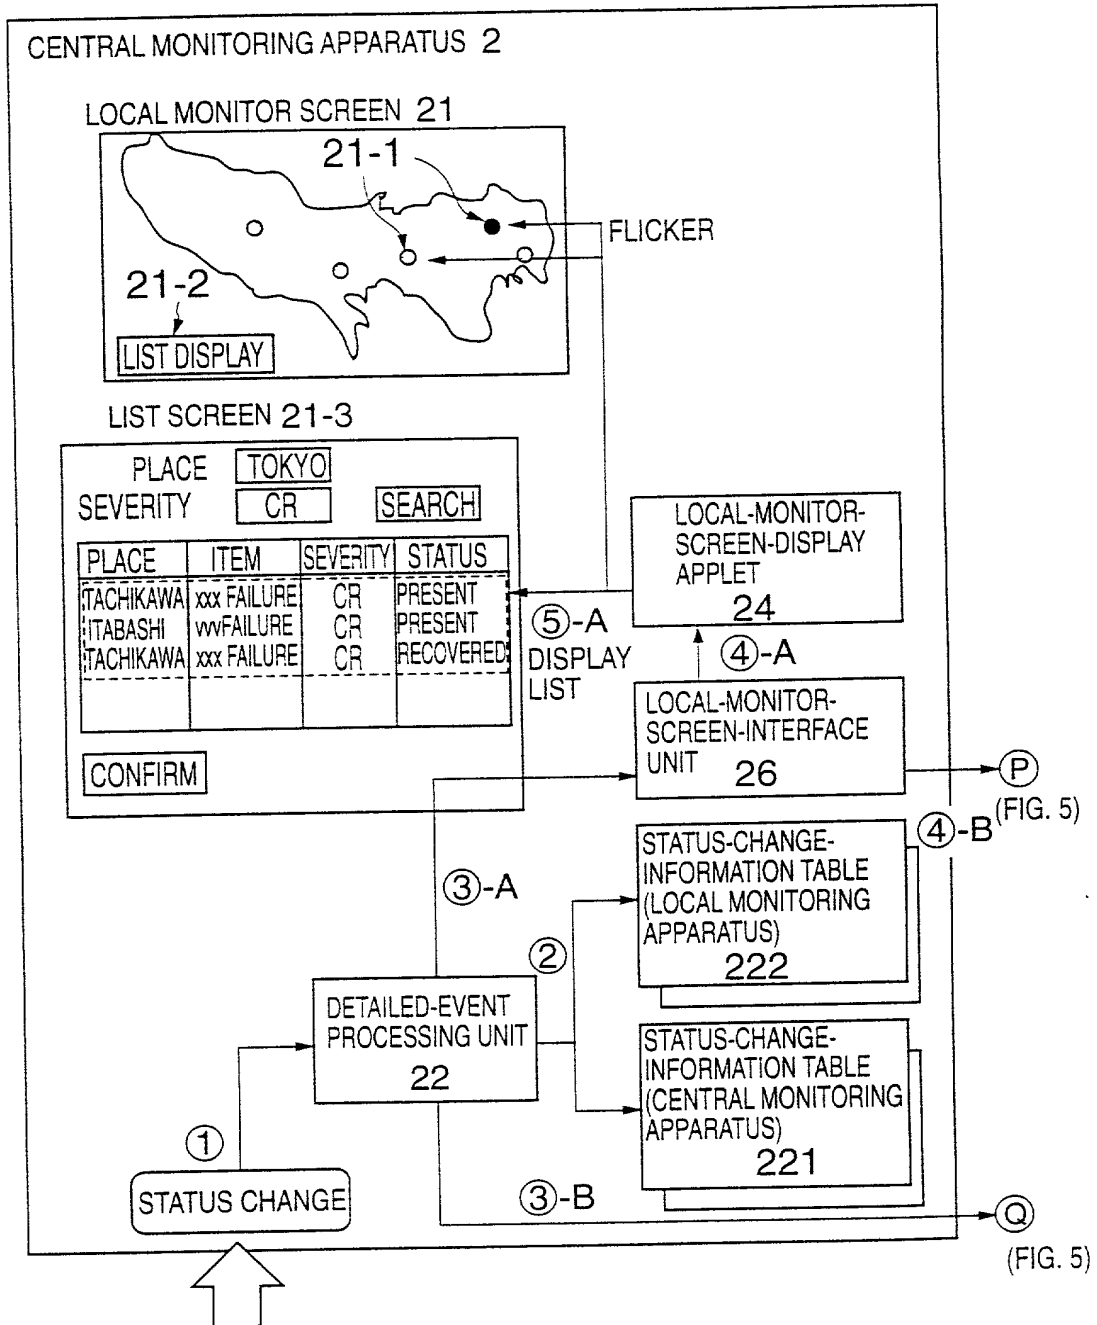


FIG. 5




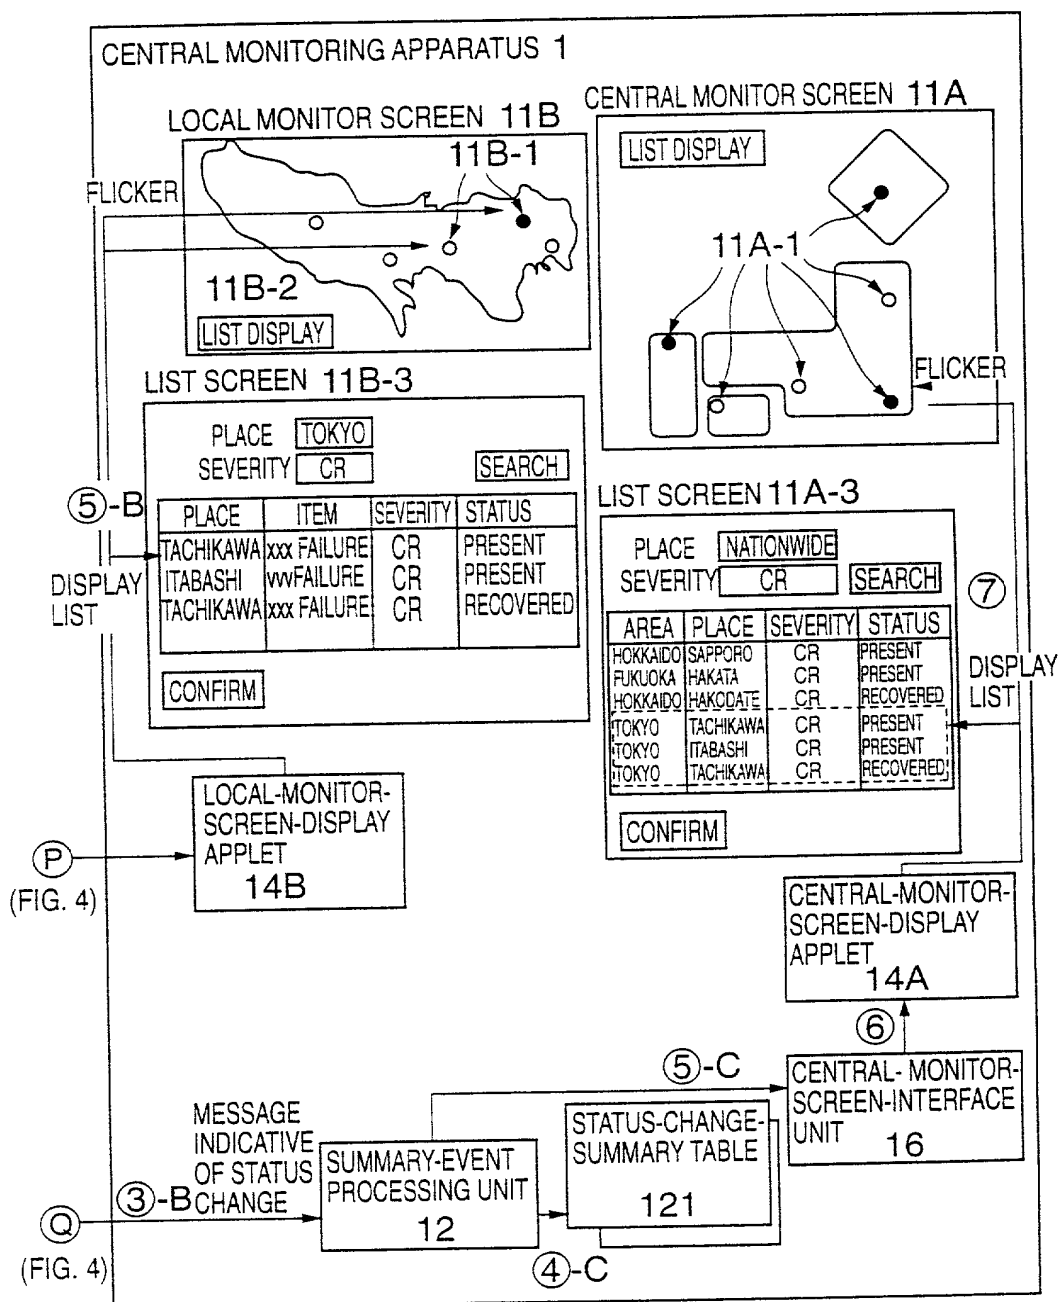

# FIG. 6

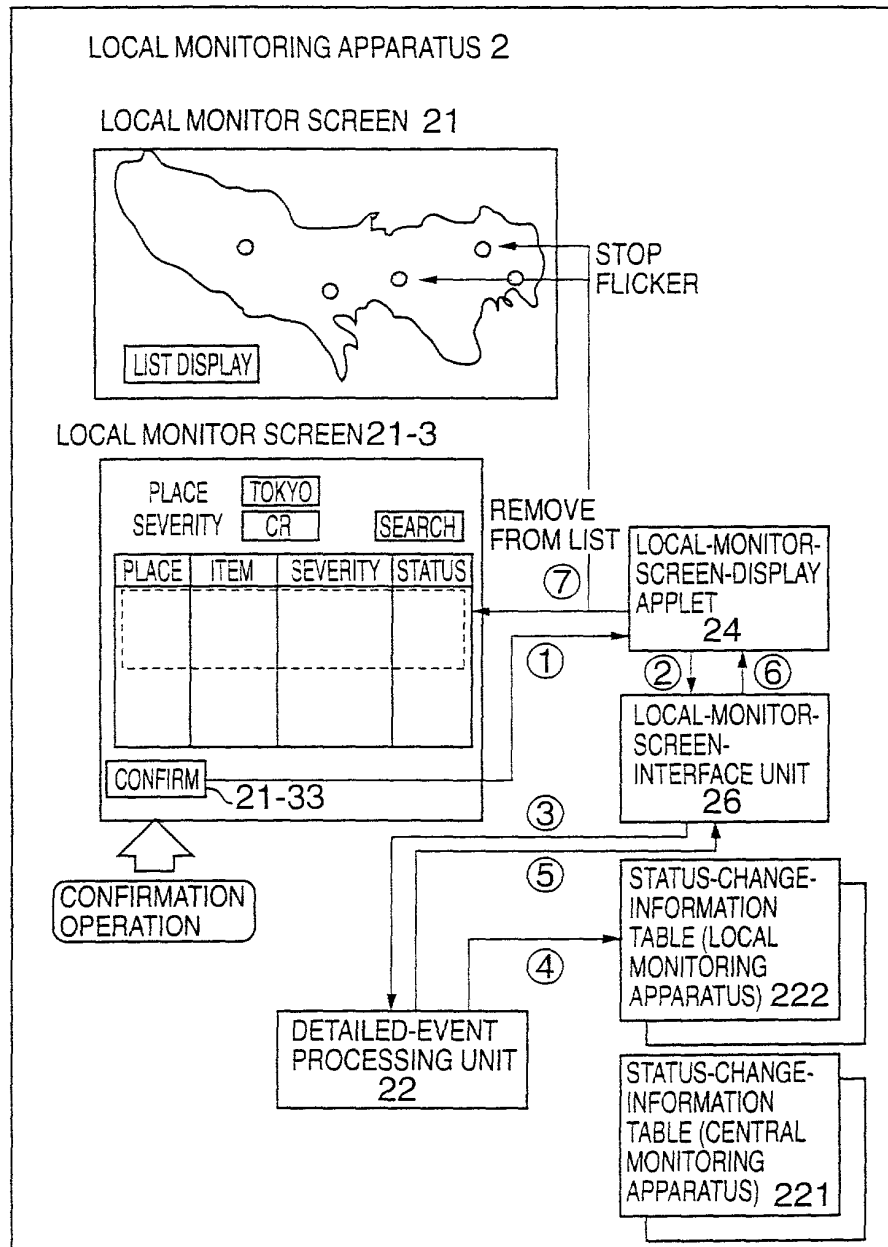

# FIG. 7

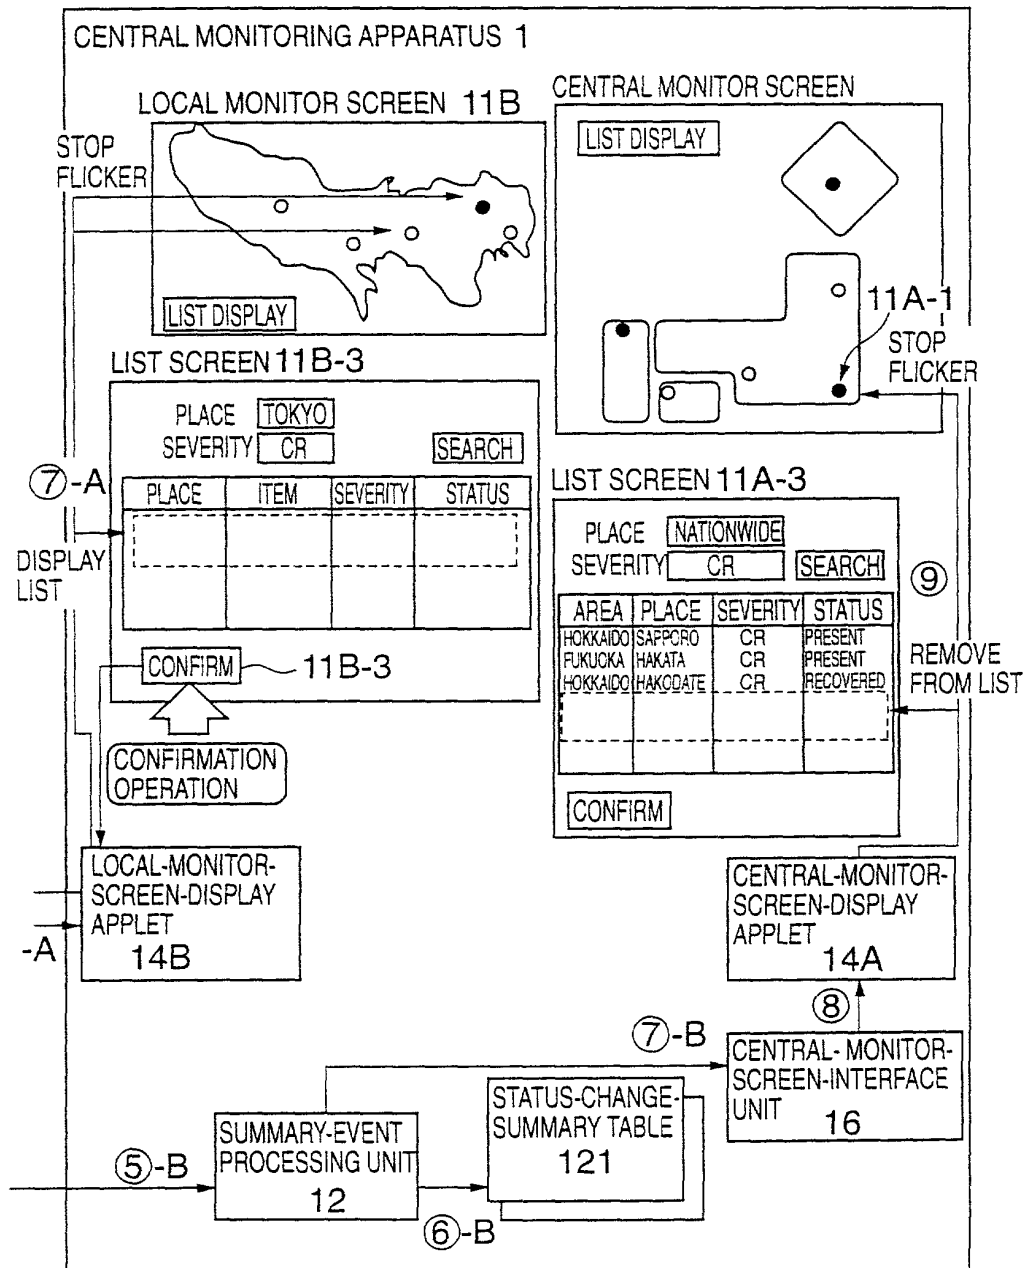

# FIG. 8


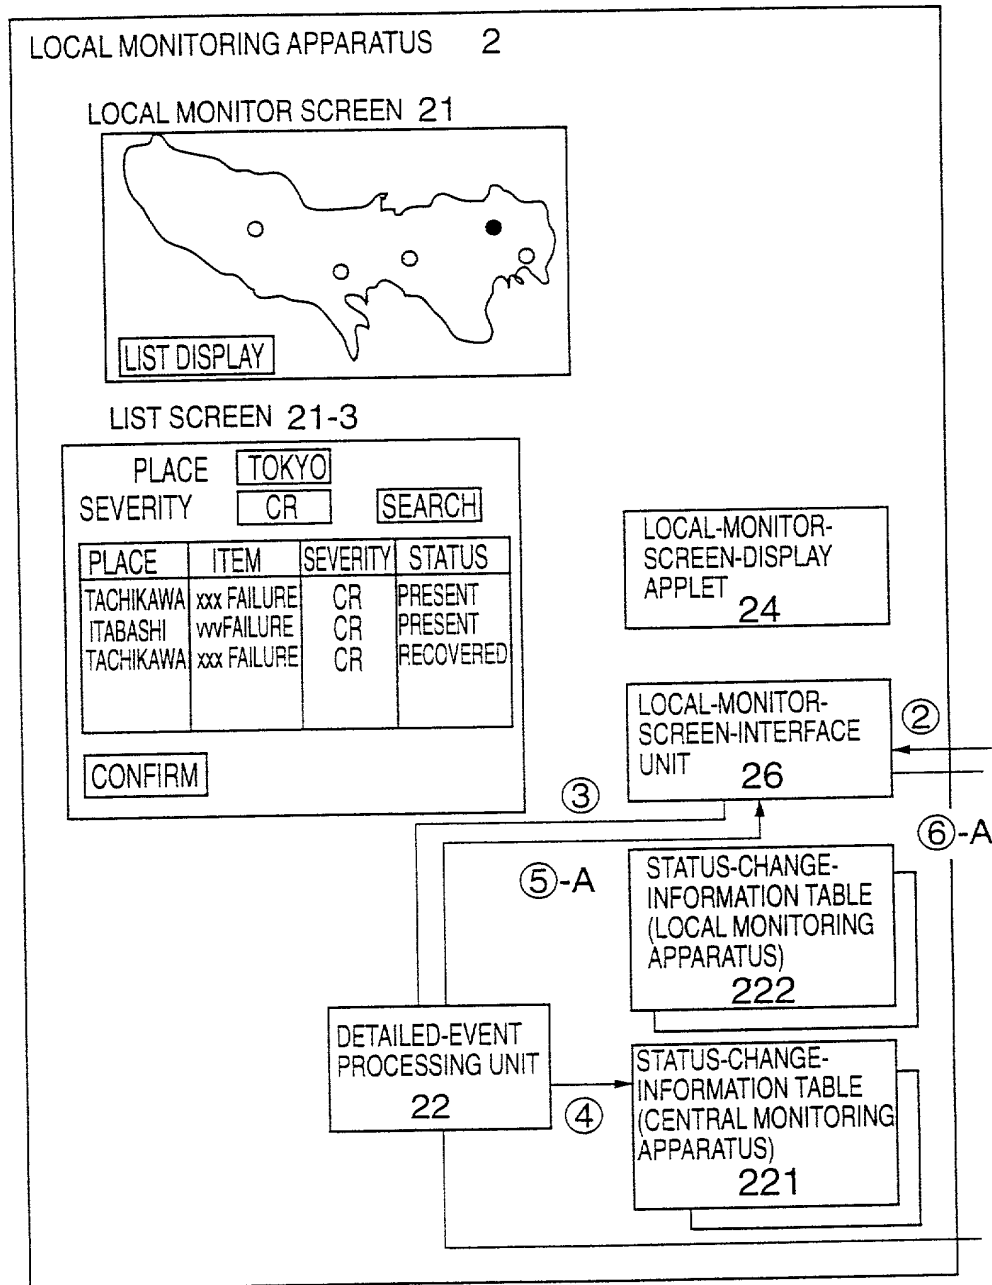


FIG. 9

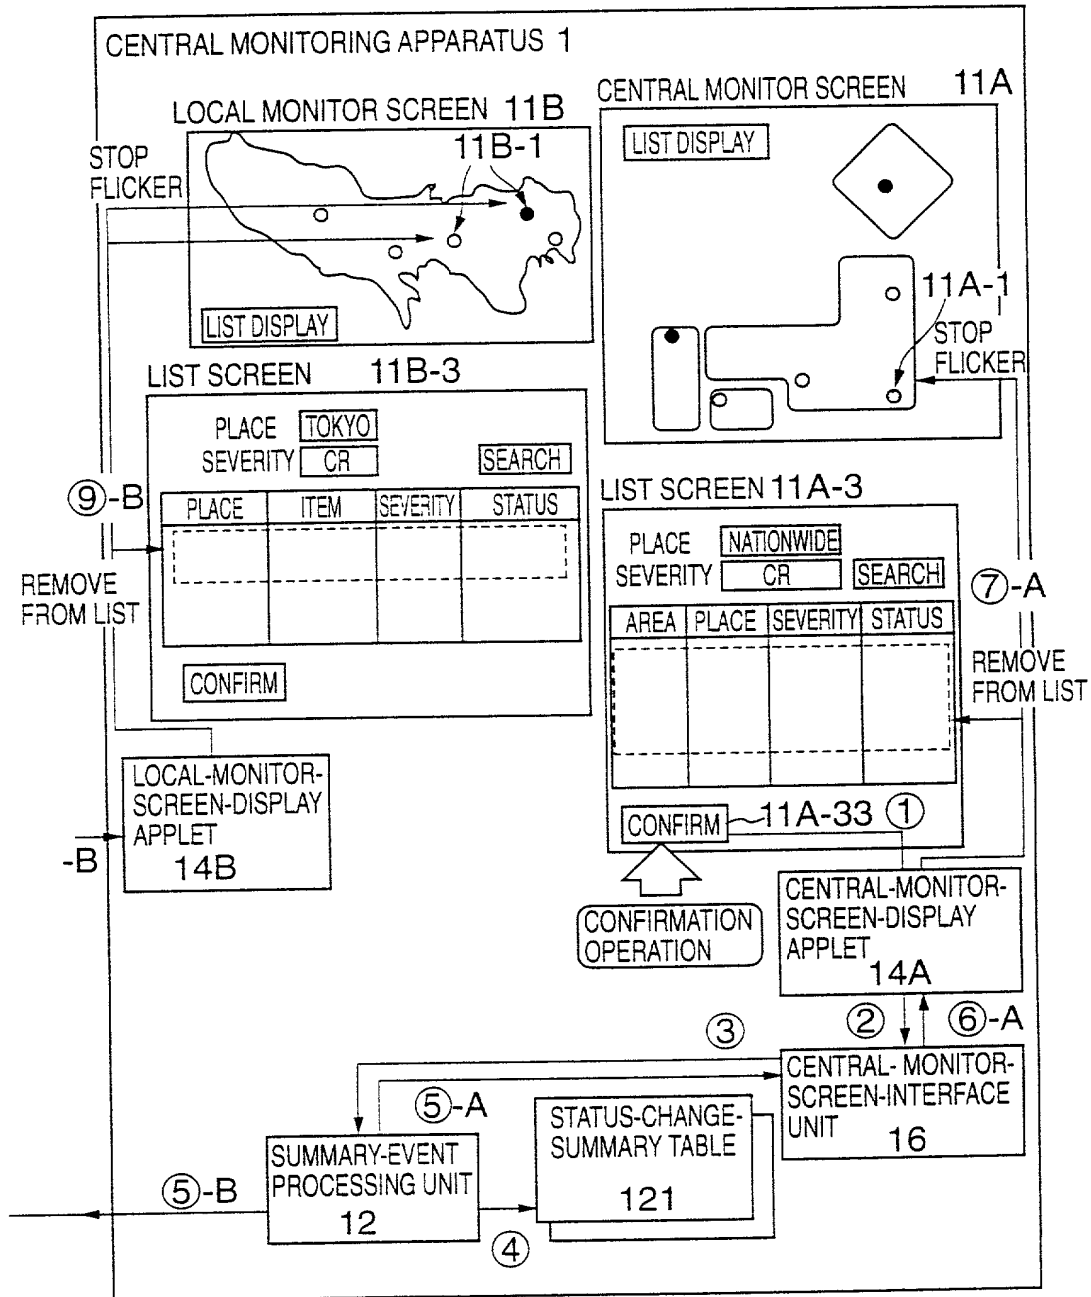

004250 2942550

FIG. 10

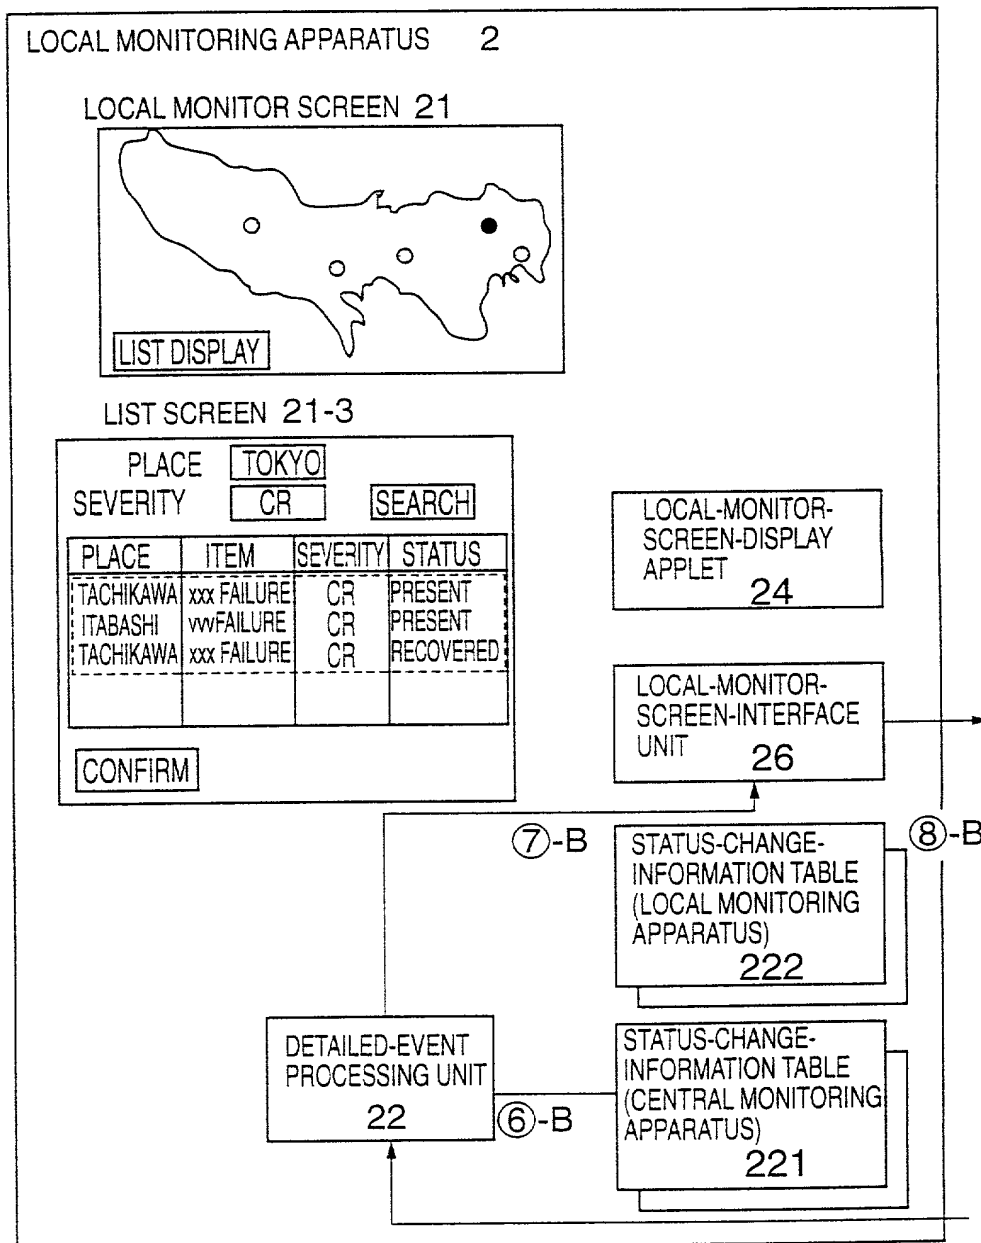


FIG. 11

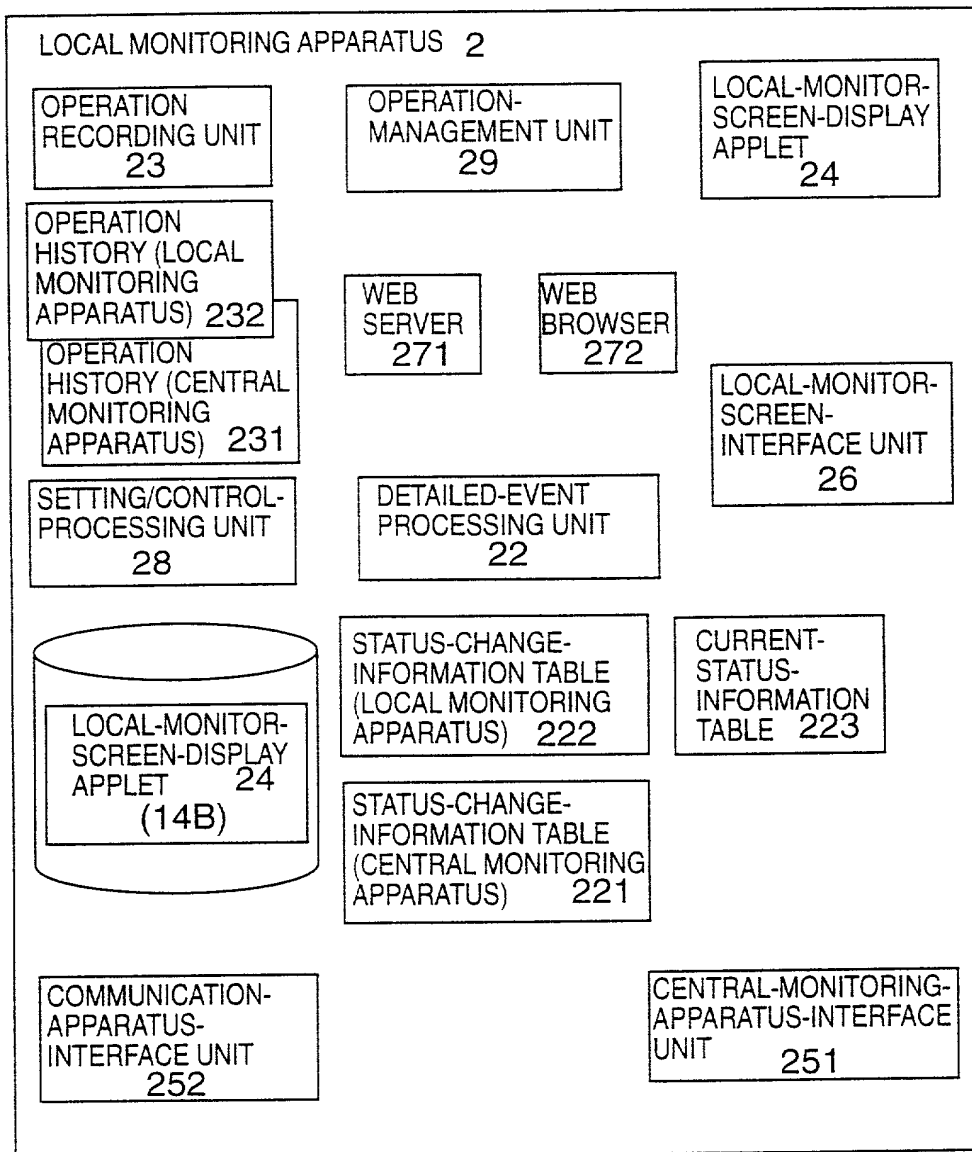


FIG. 12

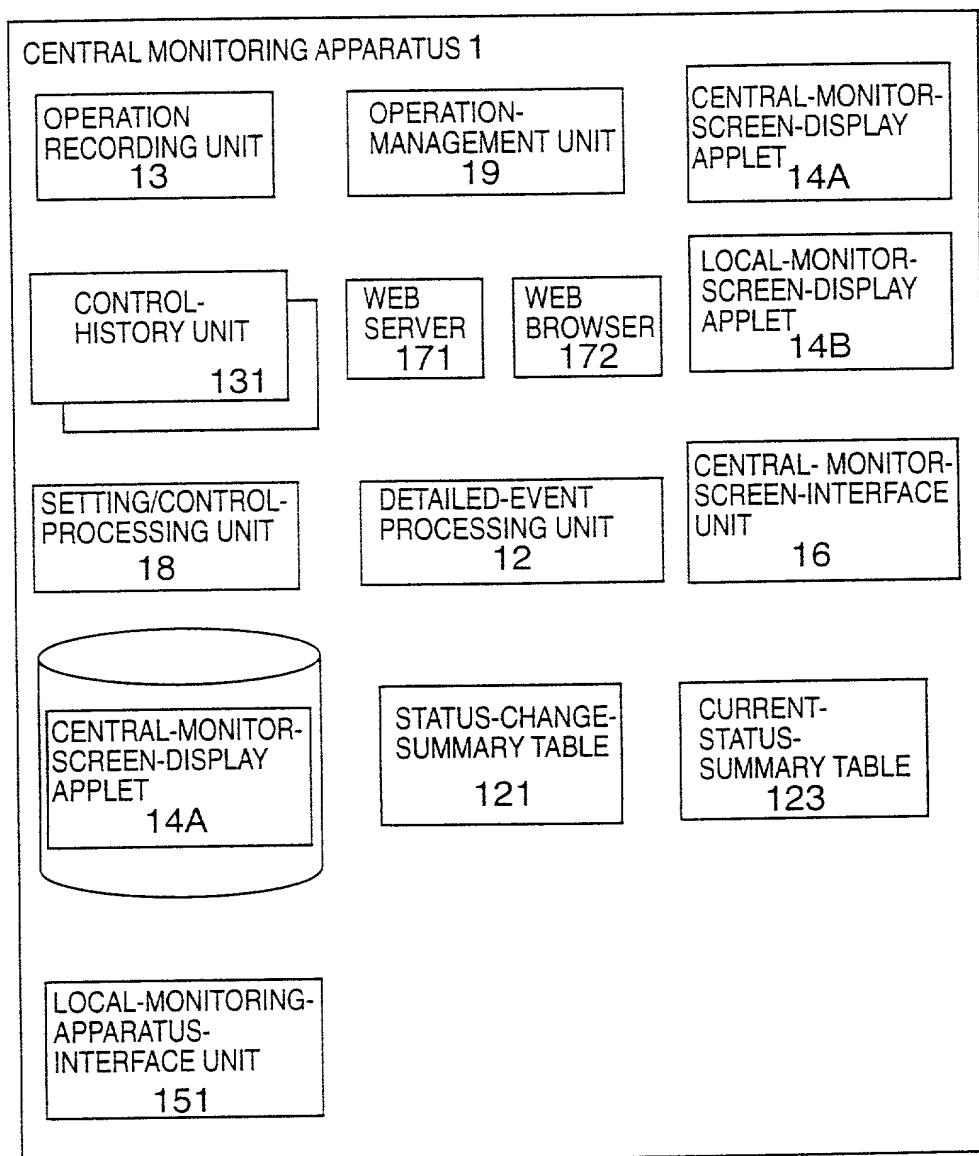


FIG. 13

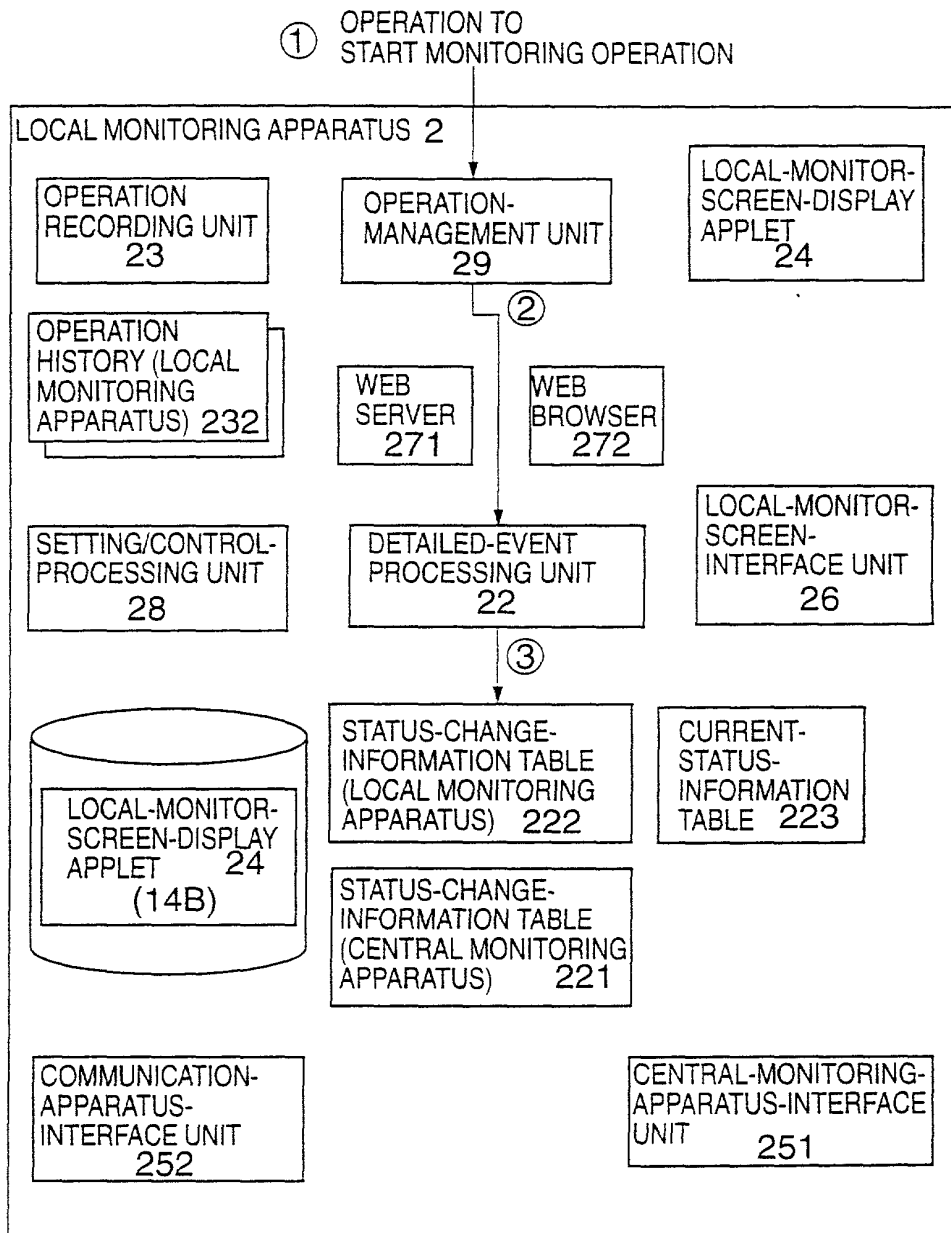




FIG. 14


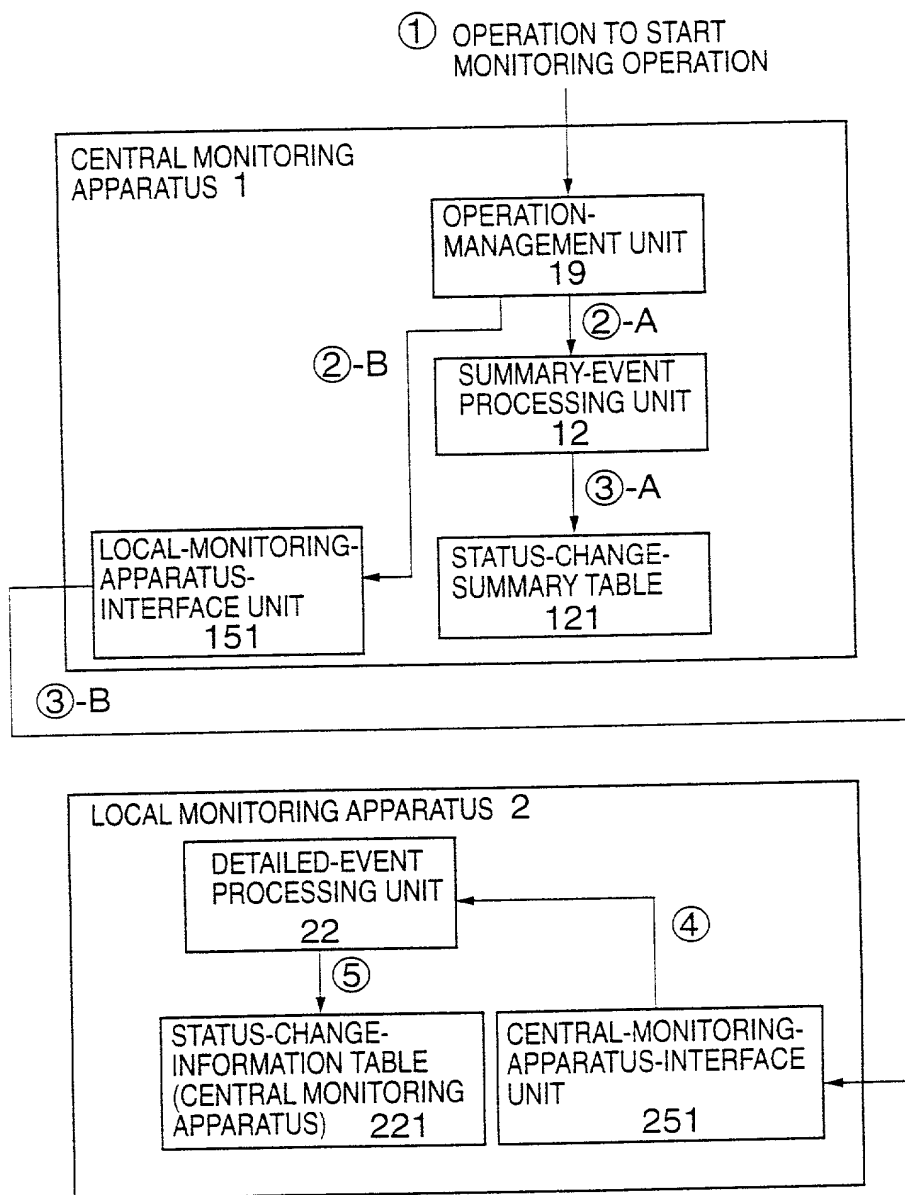


FIG. 15

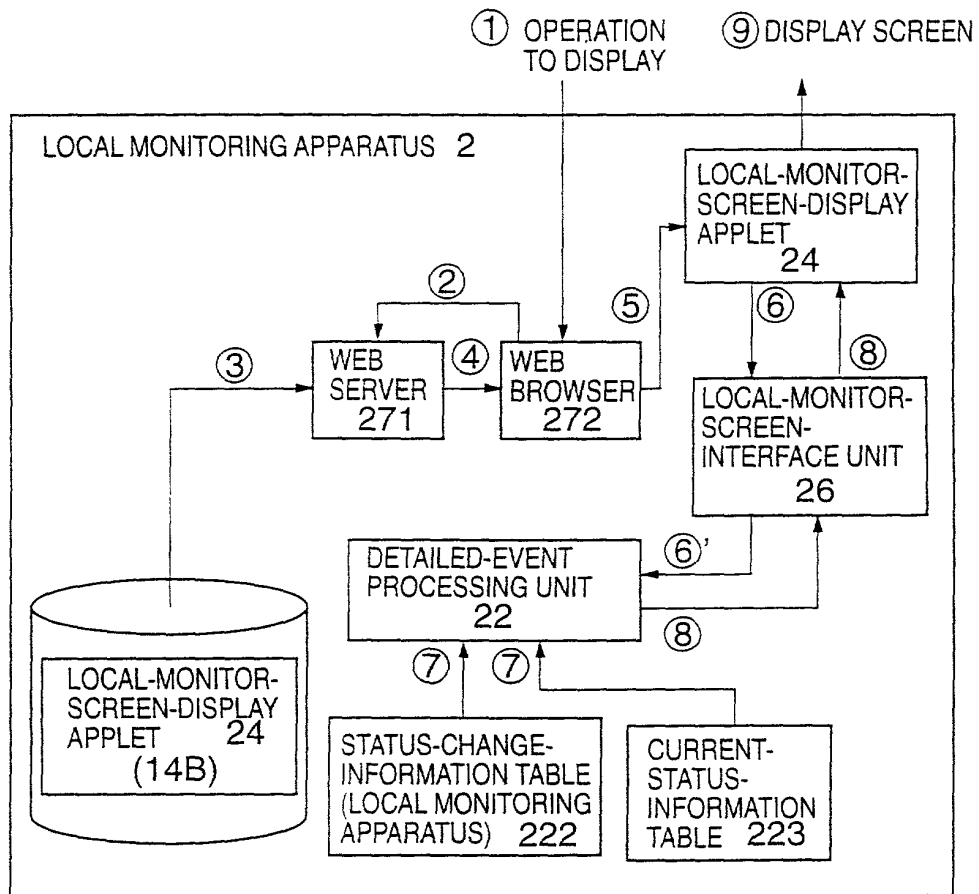

# FIG. 16

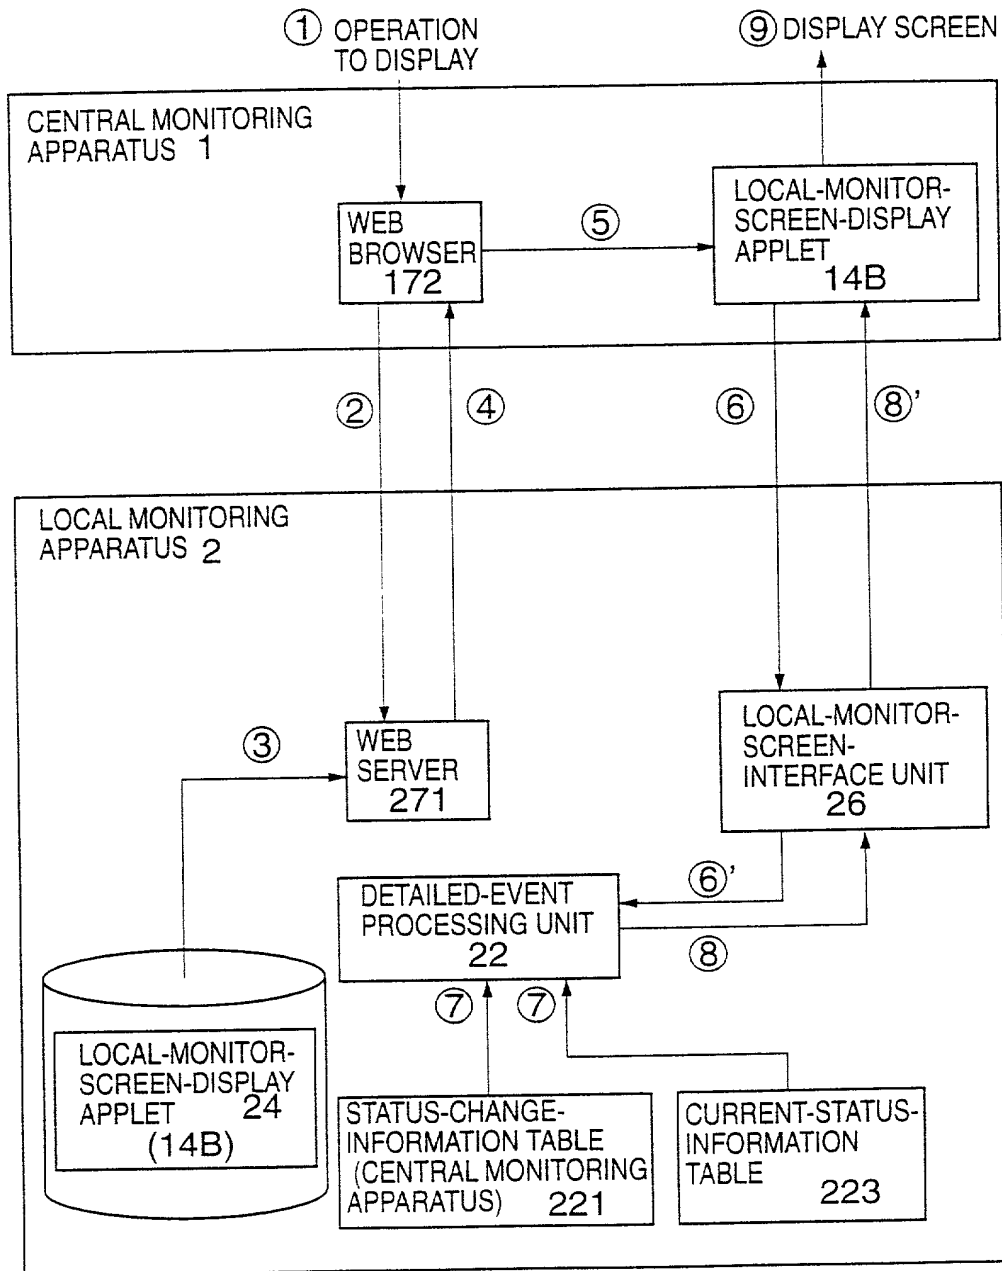


FIG. 17

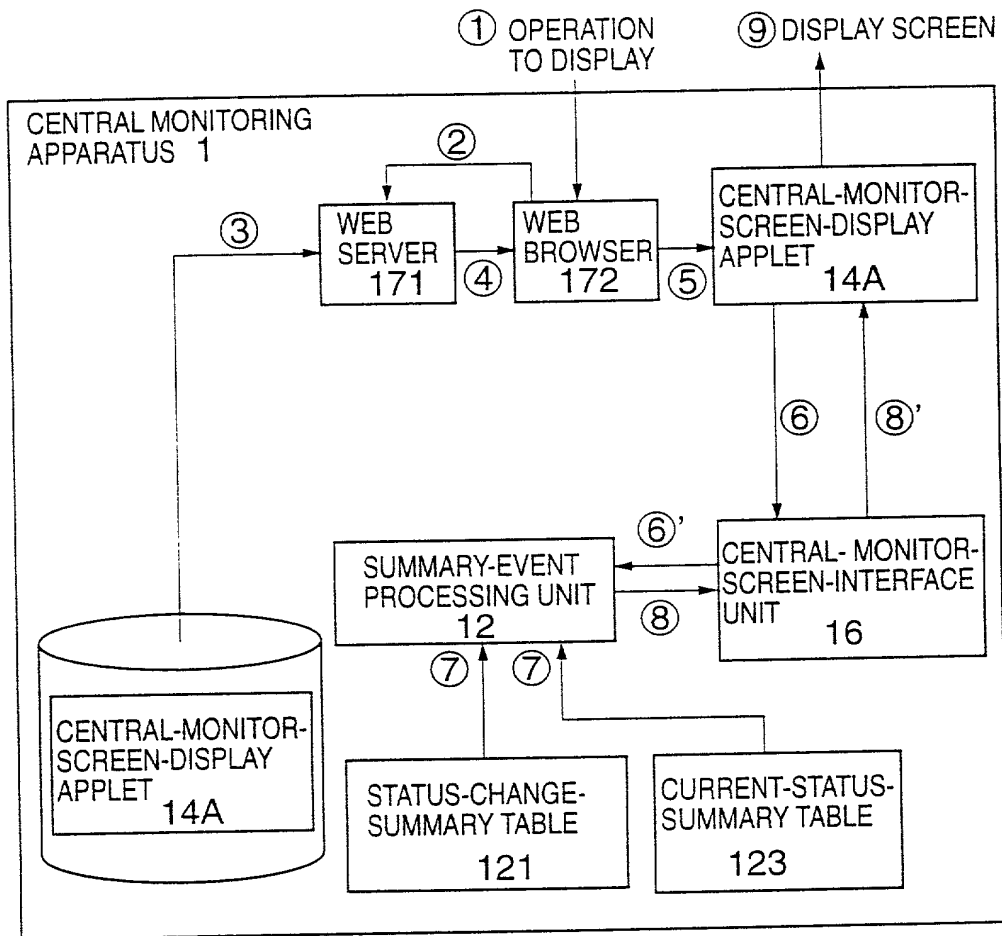


FIG. 18

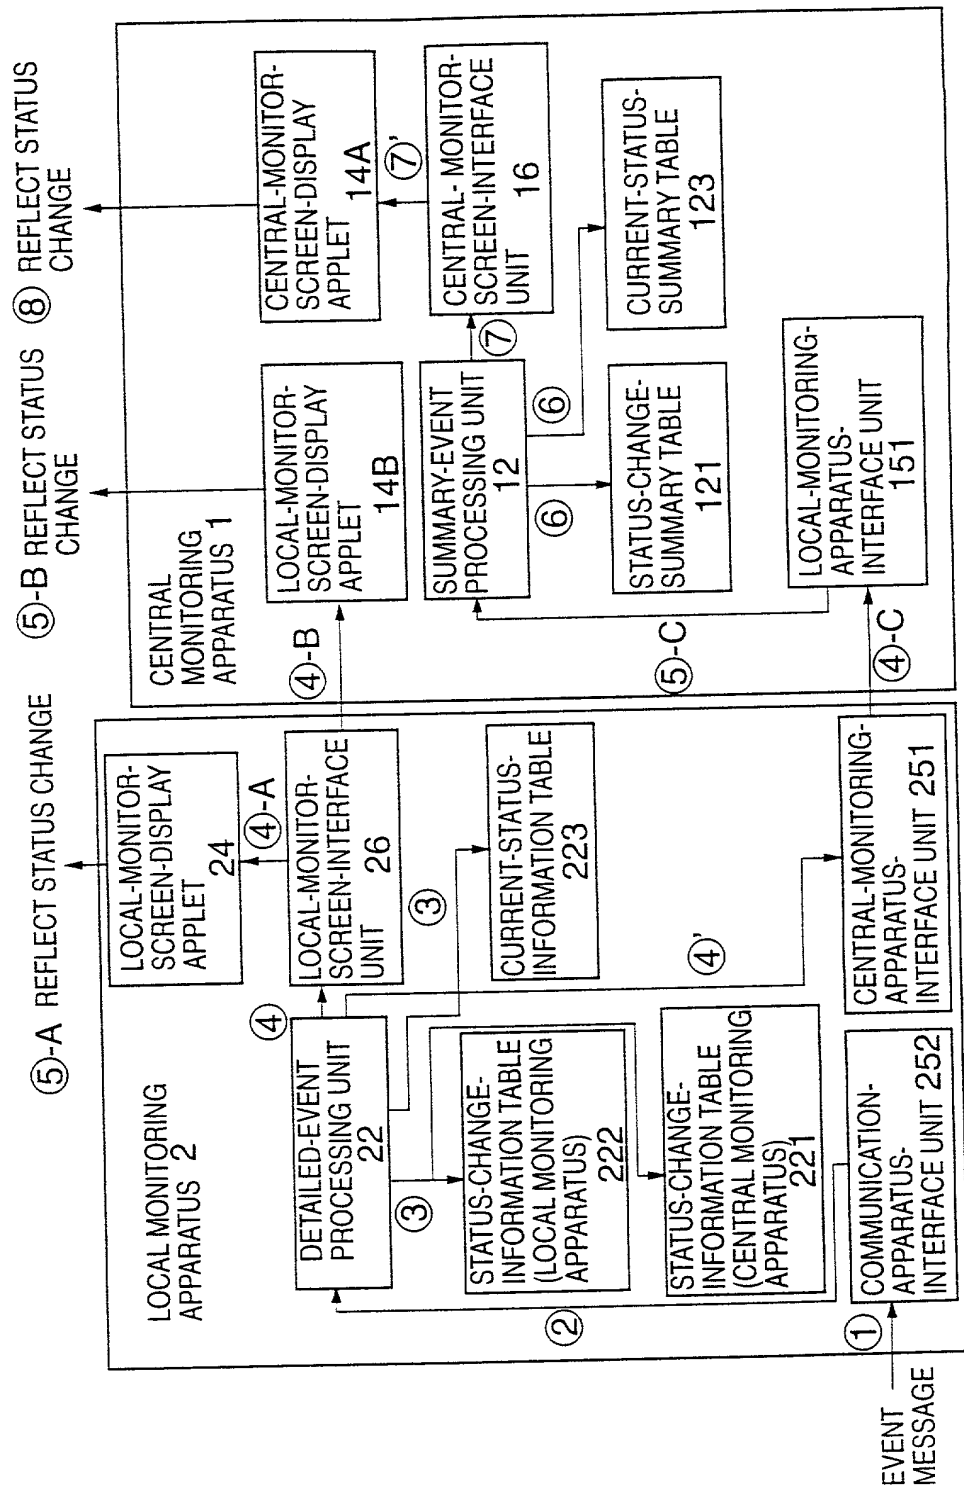


FIG. 19

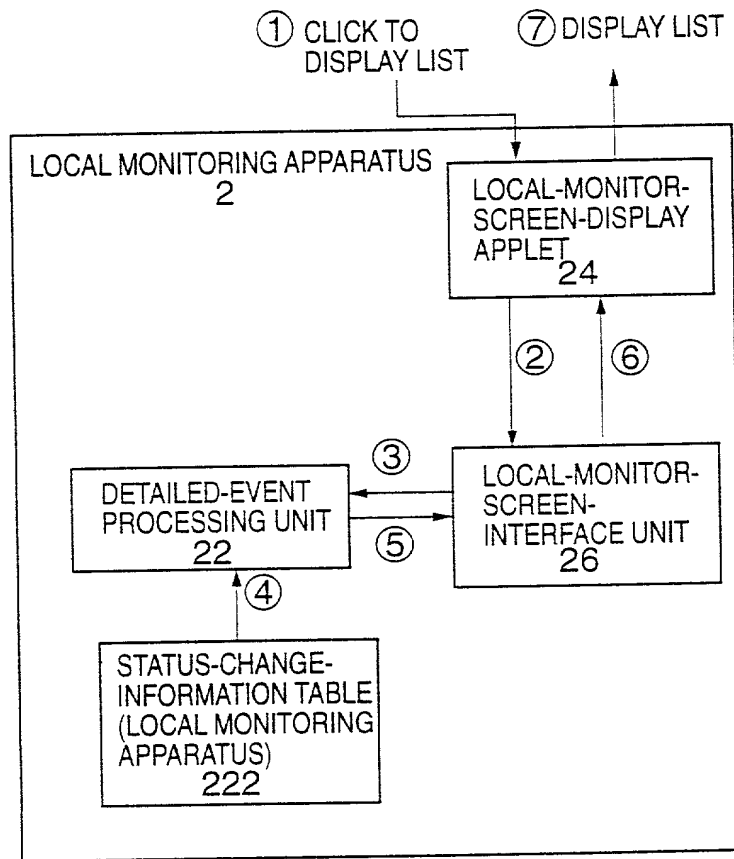


FIG. 20

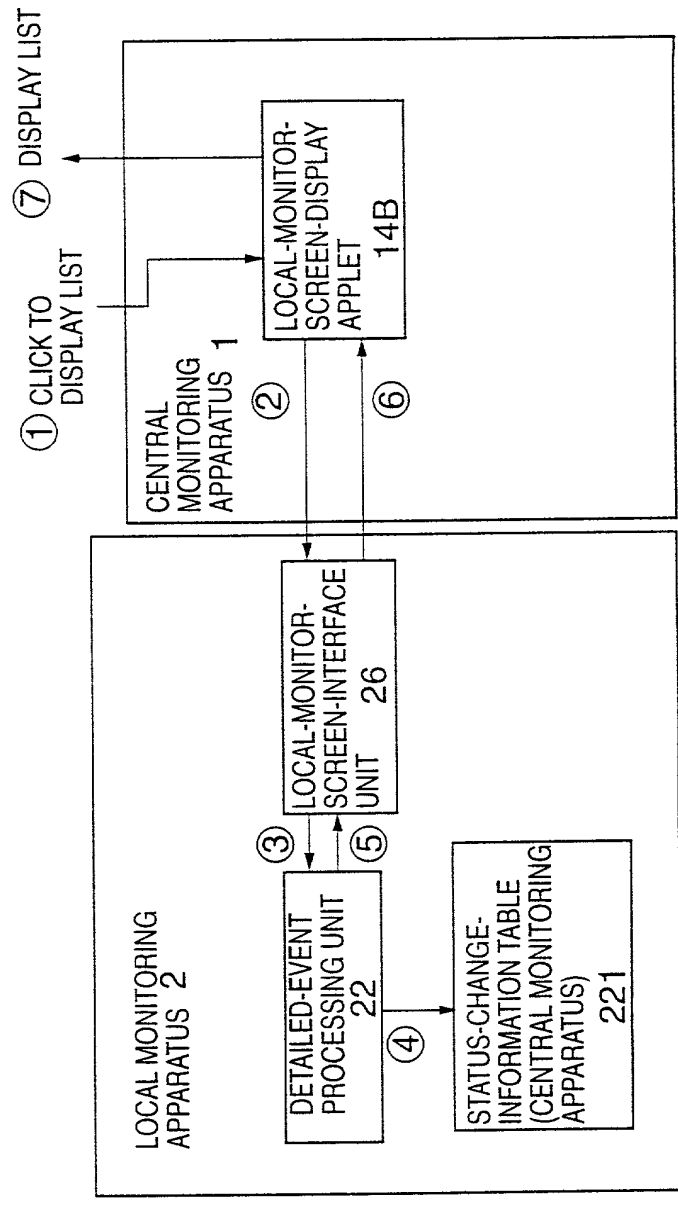


FIG. 21

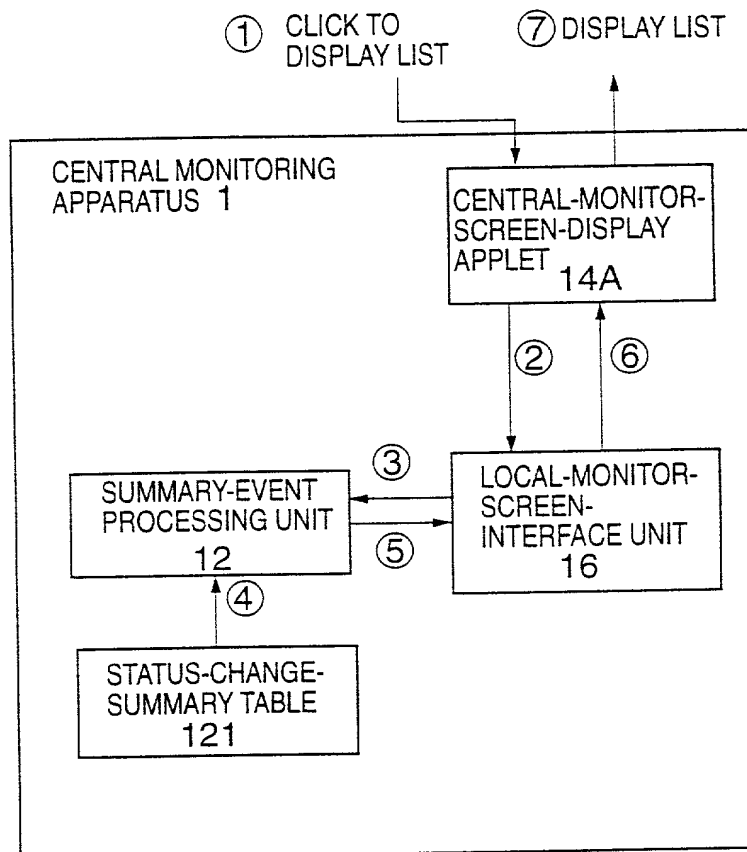




FIG. 22

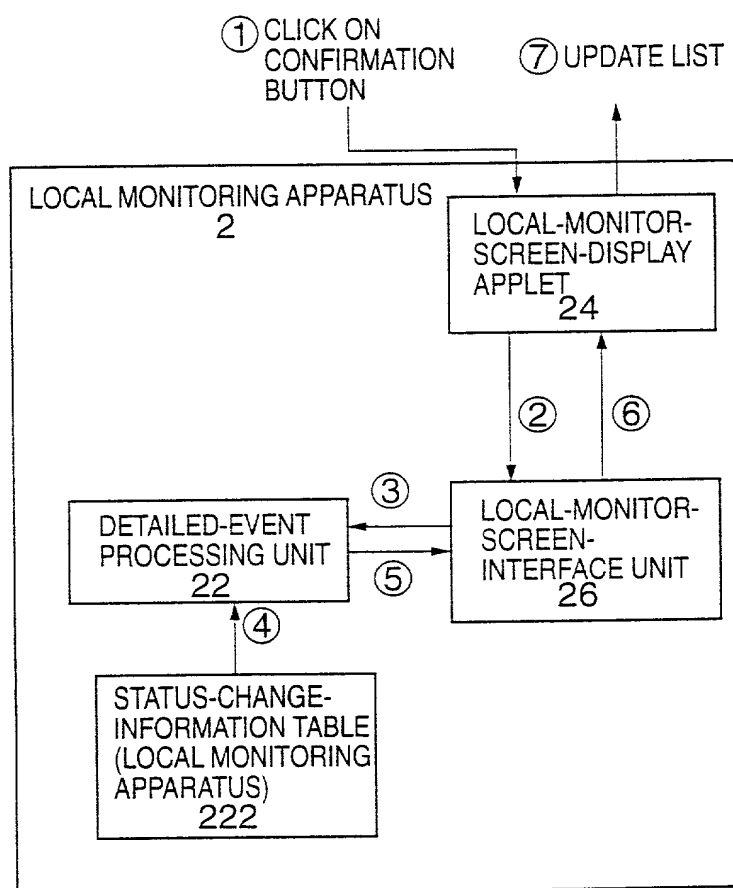


FIG. 23

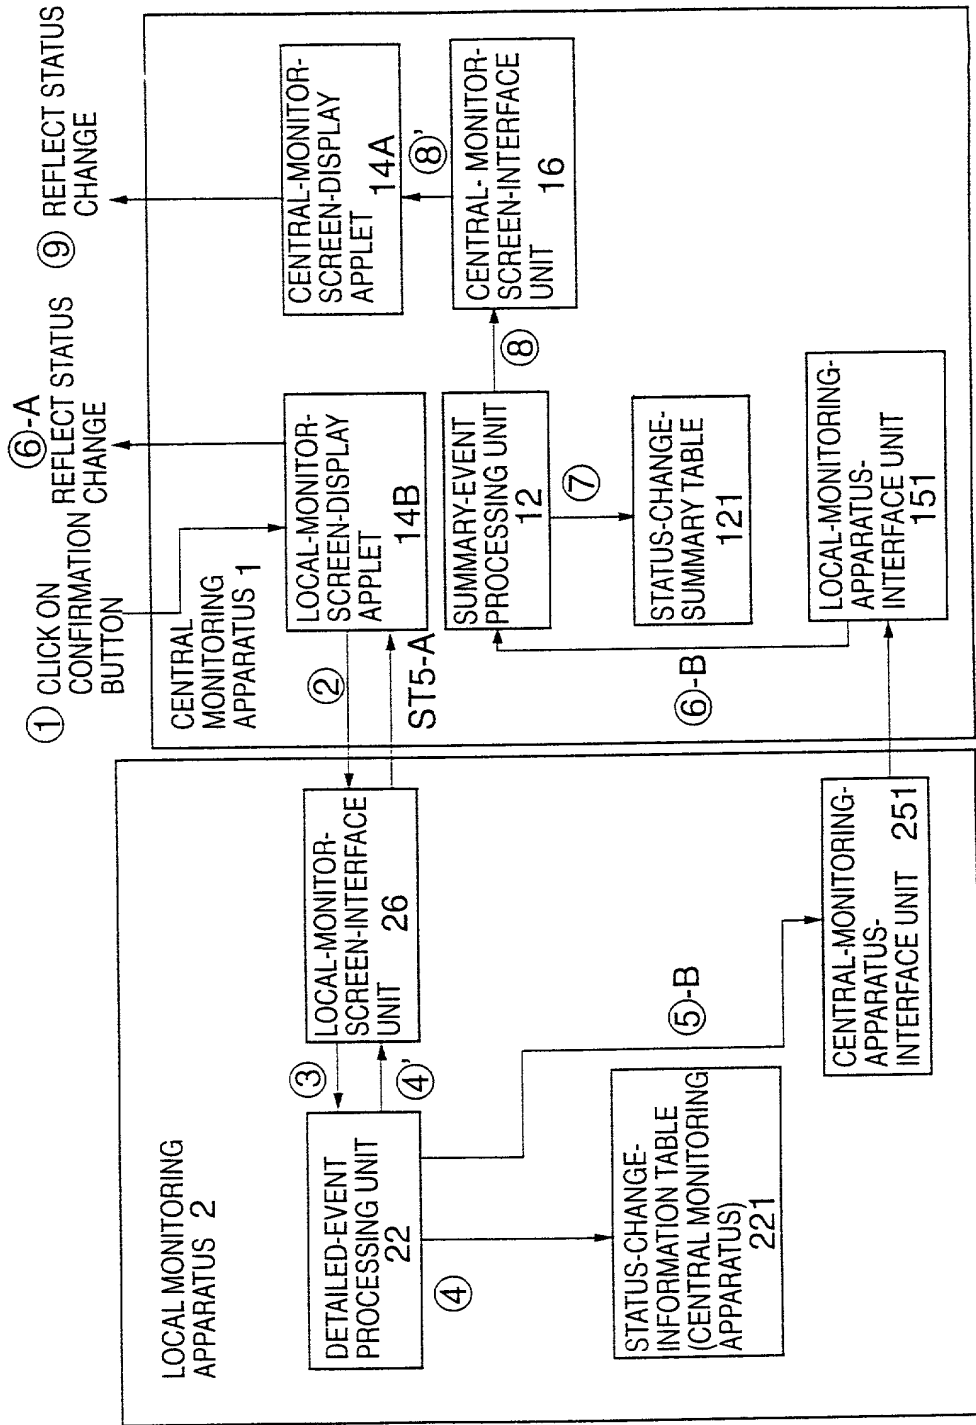


FIG. 24

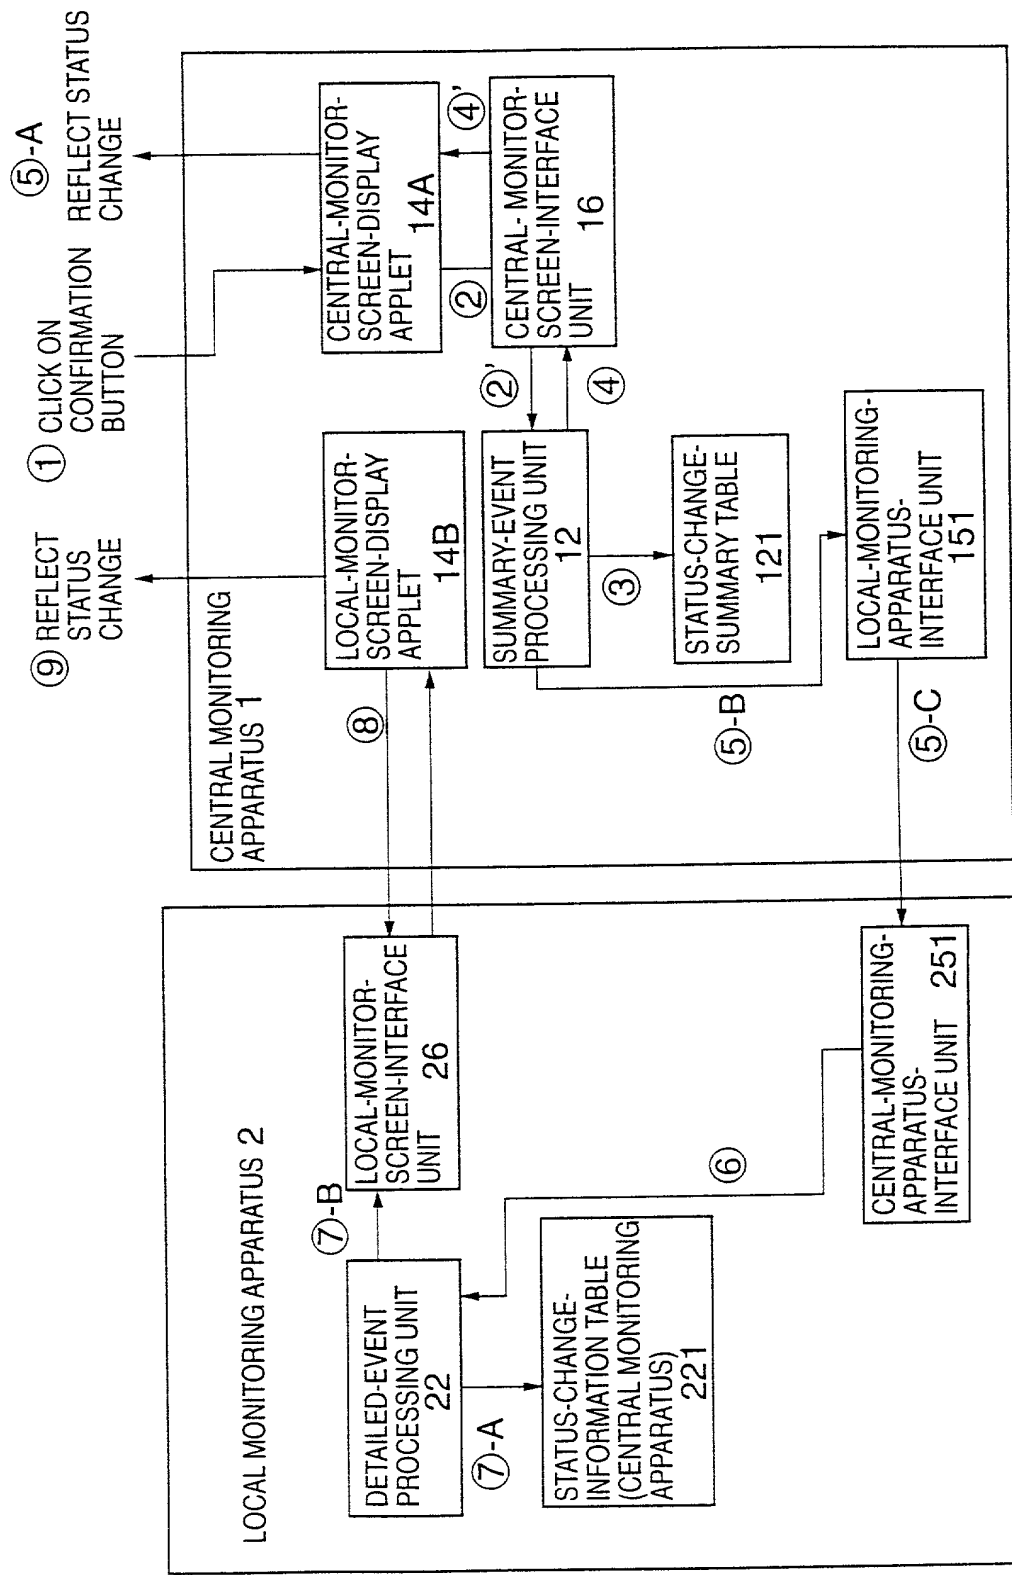


FIG. 25

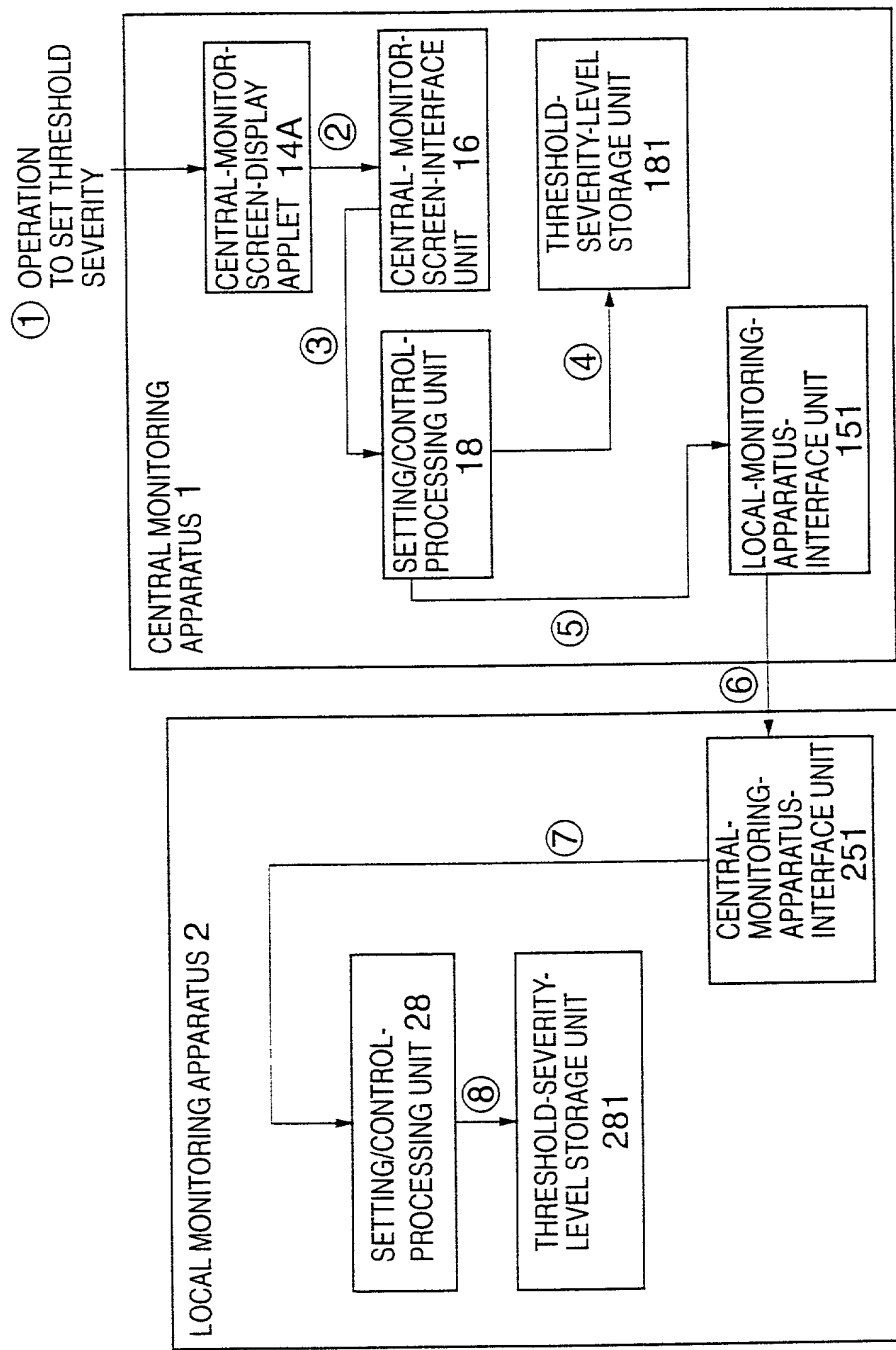


FIG. 26

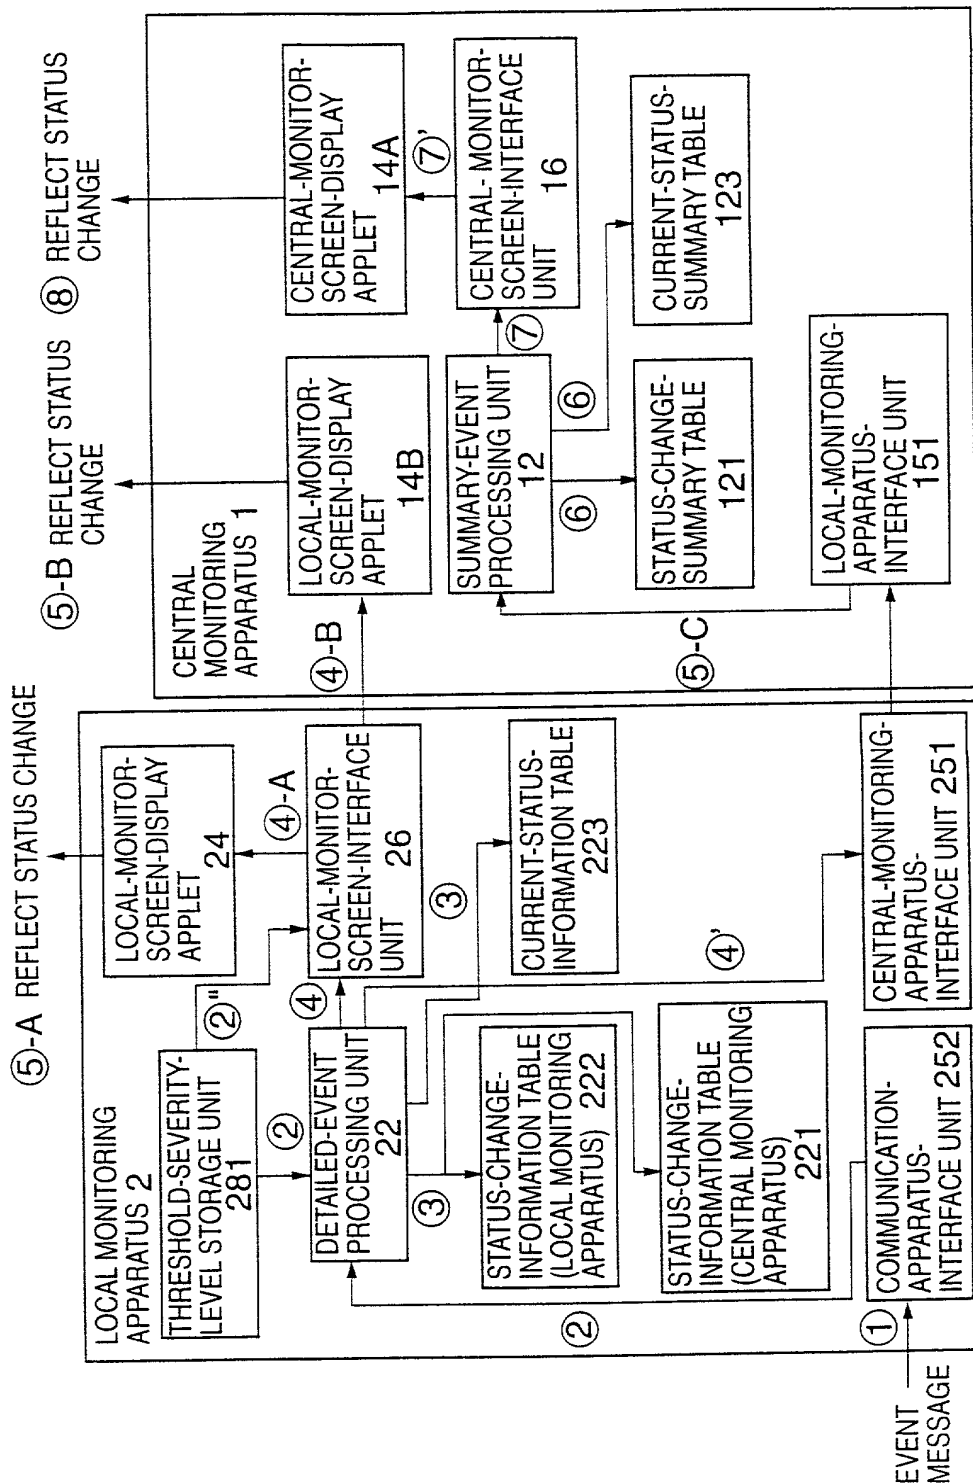


FIG. 27

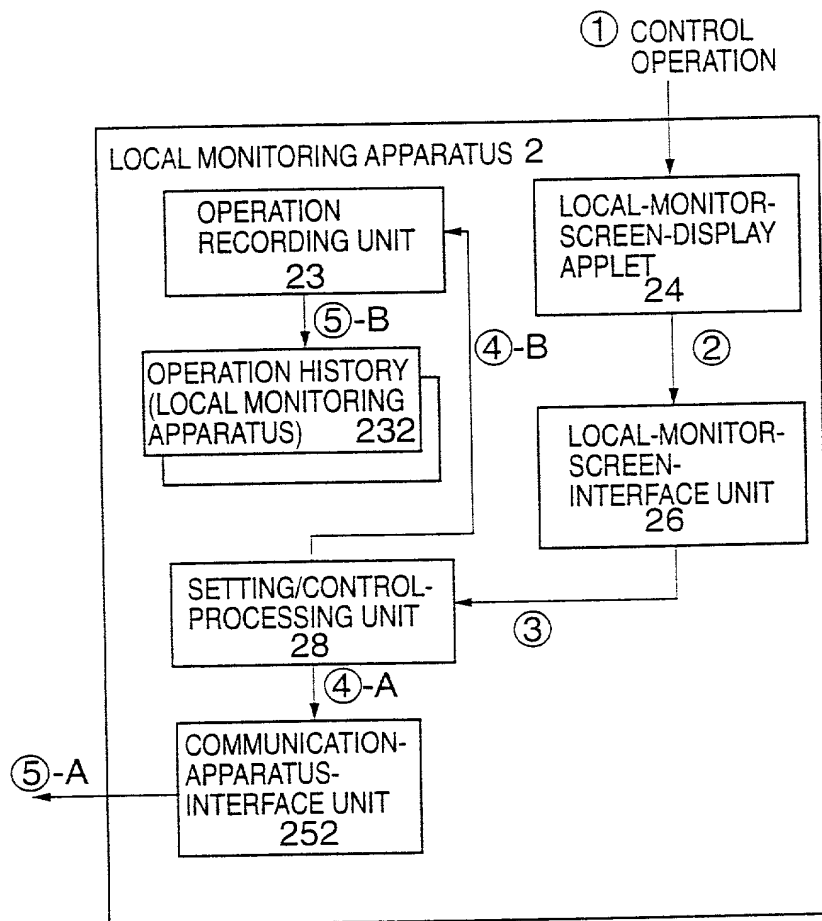


FIG. 28


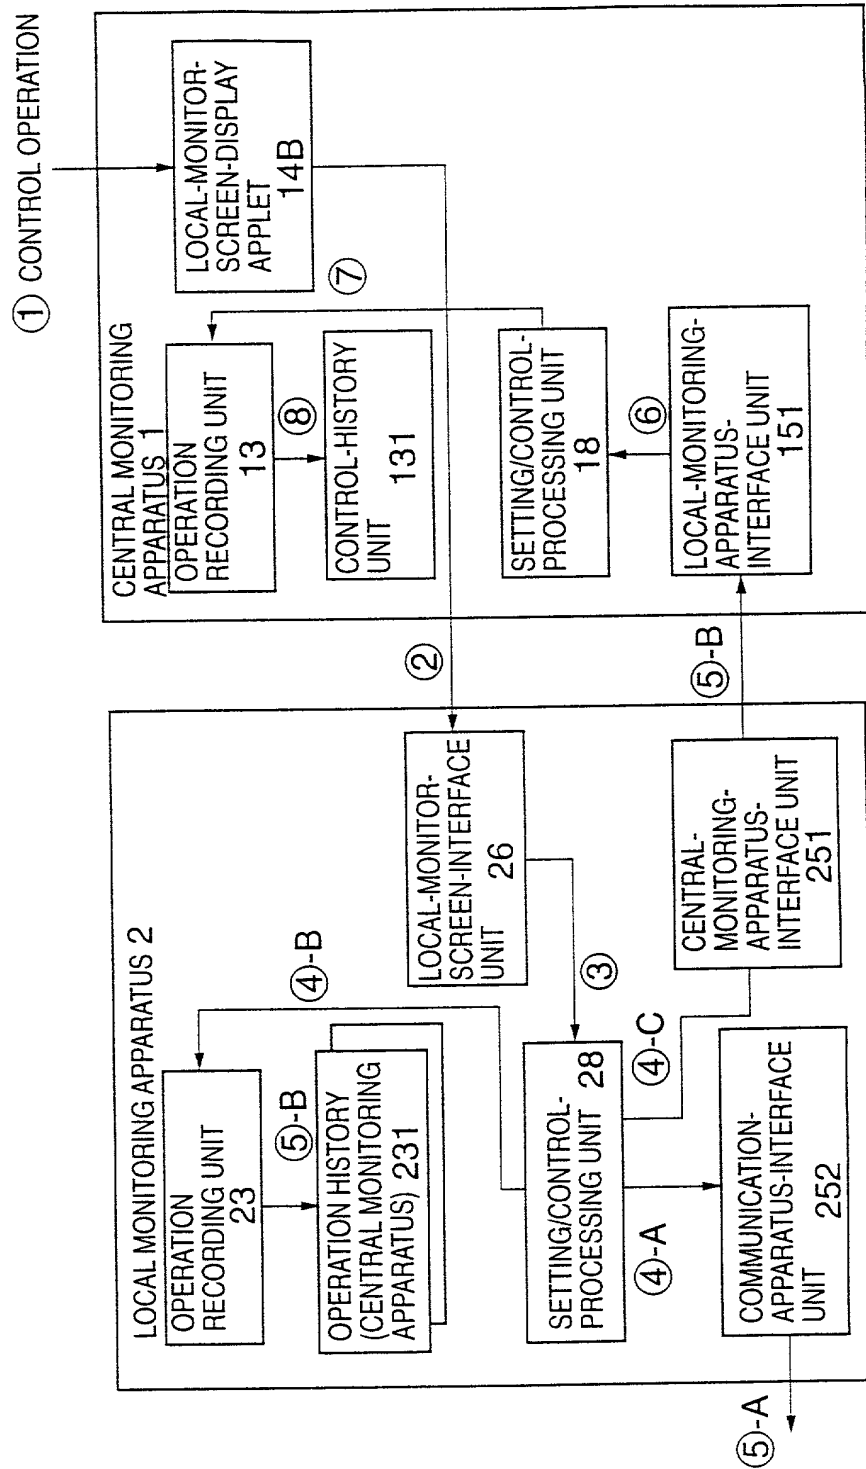


FIG. 29



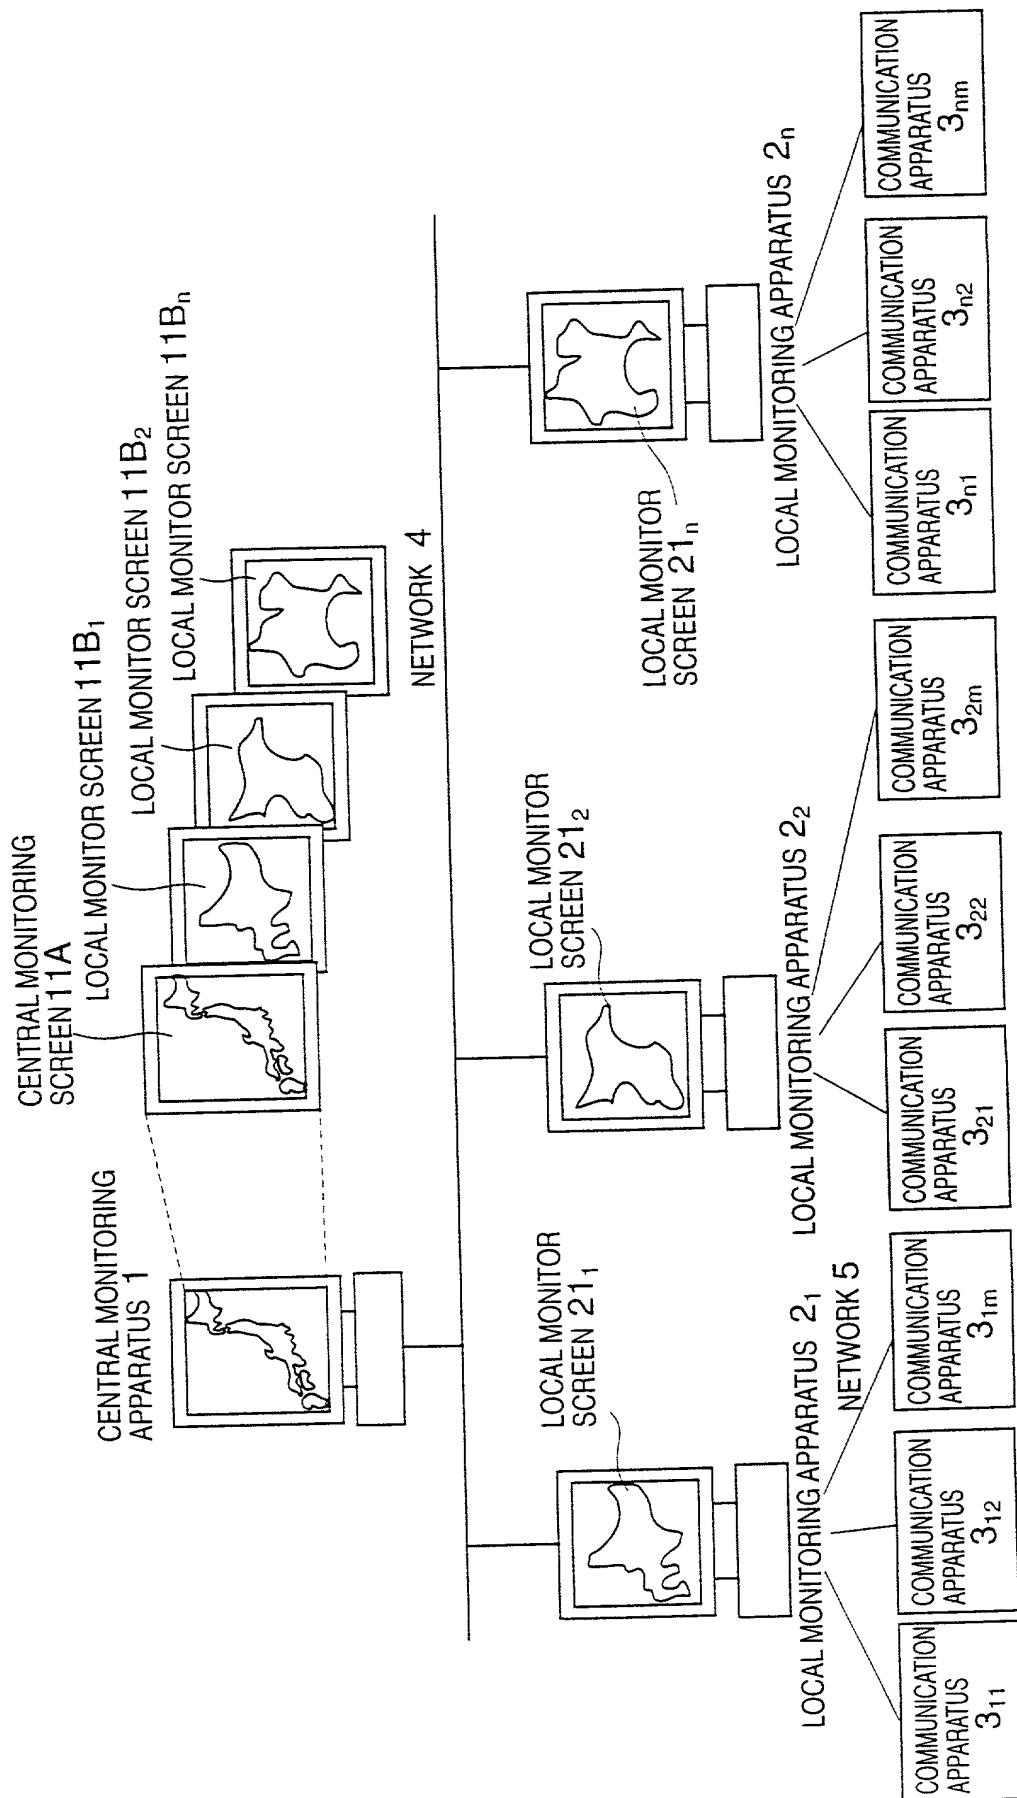

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Declaration and Power of Attorney For Patent Application****特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

MULTI-LEVEL MANAGEMENT SYSTEM FORMONITORING COMMUNICATION APPARATUSES

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
（該当する場合） \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

### Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

#### Prior Foreign Application(s)

外国での先行出願

Pat. Appln. No. 11-184797

Japan

(Number)  
(番号)

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

#### Priority Not Claimed

優先権主張なし

30/June/1999

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Japanese Language Declaration

### (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁護士、または代理人の氏名及び登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625  
Send Correspondence to:

HELFGOTT & KARAS, P.C.  
Empire State Building, 60th Floor  
New York, New York 10118  
United States of America

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.  
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor Yoshihito Kumamoto	
発明者の署名	日付	Inventor's signature <i>Yoshihito Kumamoto</i> Date April 17, 2000
住所	Residence Kawasaki-shi, Kanagawa, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any Takako Nagamine	
第二共同発明者	日付	Second inventor's signature <i>Takako Nagamine</i> Date April 17, 2000
住所	Residence Kawasaki-shi, Kanagawa, Japan	
国籍	Citizenship Japan	
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan	

（第三以降の共同発明者についても同様に記載し、署名をすること）

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Ichiro Ayukawa		
第三共同発明者	日付	Third inventor's signature Ichiro Ayukawa	Date April 17, 2000
住 所	Residence Kawasaki-shi, Kanagawa, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		
第四共同発明者	Full name of fourth joint inventor, if any		
第四共同発明者	日付	Fourth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に  
記載し、署名をすること)

(Supply similar information and signature for  
seventh and subsequent joint inventors.)

**THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Application of: **Yoshihito KUMAMOTO et al.**

Filed: : **Concurrently herewith**

For : **MULTI-LEVEL MANAGEMENT SYSTEM FOR MONITORING  
COMMUNICATION APPARATUSES**

Serial No.: **Concurrently herewith**

May 24, 2000


Assistant Commissioner of Patents  
Washington, D.C. 20231

**SUB-POWER OF ATTORNEY**

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record  
herein, do hereby grant a sub-power of attorney to Linda S.  
Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354  
and Harris A. Wolin, Reg. No. 39,432 to act and sign in my  
behalf in the above-referenced application.

Respectfully submitted,

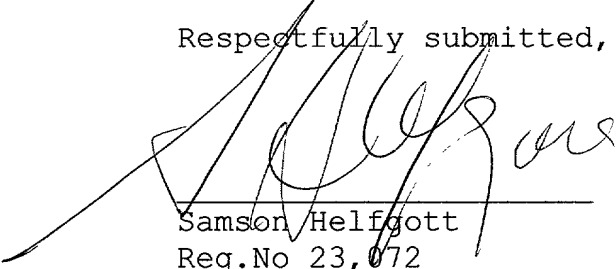  
\_\_\_\_\_  
Samson Helfgott  
Reg.No 23,072

HELFGOTT & KARAS, P.C.  
60th FLOOR  
EMPIRE STATE BUILDING  
NEW YORK, NY 10118  
DOCKET NO.: FUJI 17.354  
LHH:power

Filed Via Express Mail  
Rec. No.: EL522391749US  
On: May 24, 2000  
By: Lydia Gonzalez  
Any fee due as a result of this paper,  
not covered by an enclosed check may be  
charged on Deposit Acct. No. 08-1634.

004250 4942560